


■DESCRIPTION

The C-VD6 is a video distributor for use in color or black and white camera systems. It distributes 1 video signal to 6 outputs, or 2 different signals to each of 3 outputs, and can monitor the camera image on plural video monitors simultaneously.


■SPECIFICATIONS

Power Source	230 V AC, 50/60 Hz
Power Consumption	4.5 W (5.4 VA)
Video Input	2 inputs, 1.0 V(p-p), 75 Ω, BNC
Video Output	6 outputs, 1.0 V(p-p), 75 Ω, BNC
Distribution	1 IN - 6 OUT or 2 IN - each of 3 OUT, switchable
Operating Temperature	-10 °C to 50 °C
Finish	Panel: Aluminum, black, 30% gloss Case: Pre-coated steel plate, black, 30% gloss
Dimensions	210 (W) × 46 (H) × 296 (D) mm
Weight	2 kg
Option	Rack mounting bracket: MB-15B-BK (for rack mounting one C-VD6 unit) MB-15B-J (for rack mounting two C-VD6 units)


■APPEARANCE

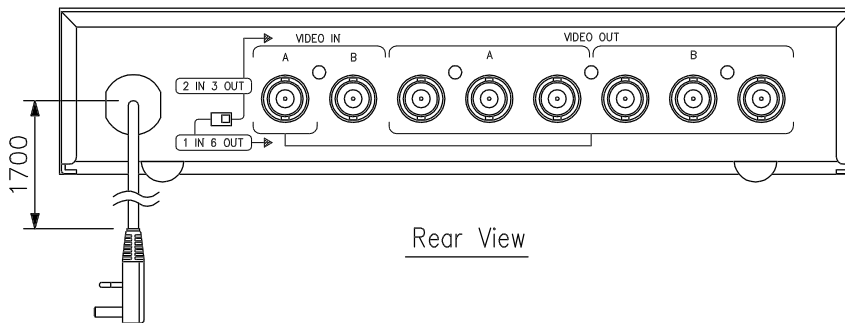

Rear View

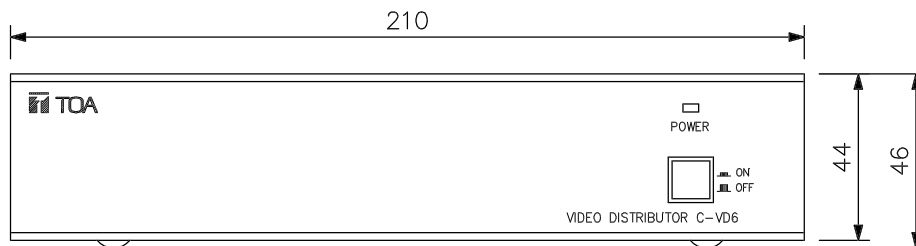

Front View

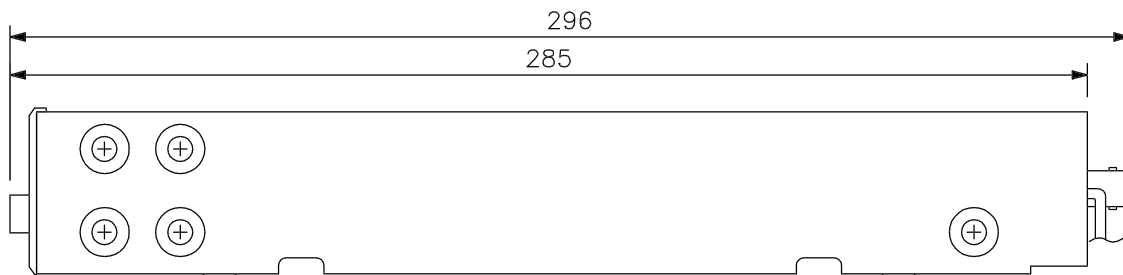

Side View

UNIT:mm SCALE:1/2