

■DESCRIPTION


The V-1051B is a microphone preamplifier module with compressor and programming function which designed for use with the VM series mixer power amplifiers and the mixerflame.

■SPECIFICATIONS

* 0 dB = 1 V

Power Source	24 V DC
Current Consumption	40 mA
Input Sensitivity and Impedance	-60 dB*, 600 Ω, balanced with compressor
Output Level and Impedance	-20 dB*, 10 kΩ
Frequency Response	30 Hz - 20 kHz, ± 1dB
Speech Filter	-12 dB at 100 Hz
Distortion	0.3 % or less (f=1 kHz sine wave)
Noise Level	-124 dB* (20 Hz - 20 kHz, 200 Ω terminated)
Indicator	In-use indicator (green LED)
Control	1 X slide volume control
Programming Function	Highest priority, 1st-in-1st served priority Cascade priority, Speech filter Busy indication, Chime indication Mic enable function
Connections	Input: 5-pin DIN socket Output and power received: 10-pin card connector
Color	black
Dimensions	40 (W) × 129 (H) × 212 (D) mm (1.57" × 5.08" × 8.35")
Weight	151 g (0.33 lb)

■APPEARANCE

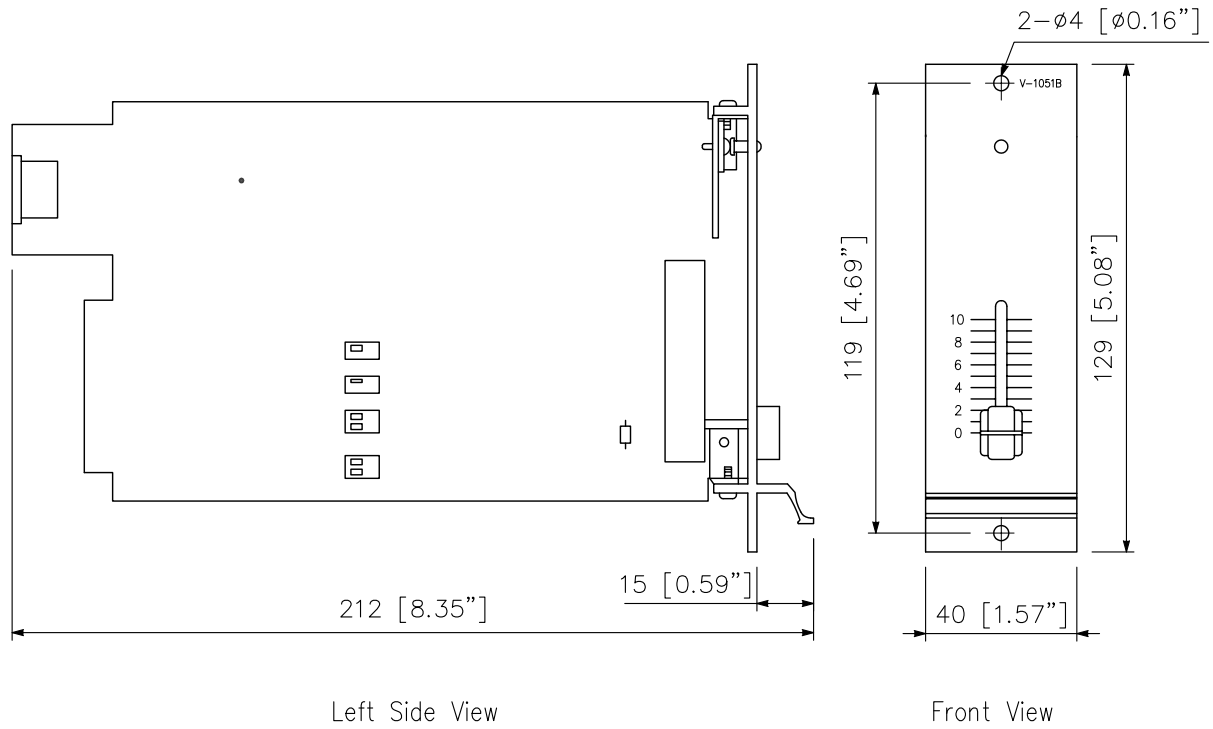

UNIT:mm SCALE:1/2