

DESCRIPTION


The VX-200XI module is designed to be used in conjunction with the VX-2000 System Manager, and comes with control input terminals, low-cut and high-cut filters, and gain controls.

SPECIFICATIONS


* 0 dB = 1 V

Power Source	Supplied from VX-2000
Current Consumption	Under 30 mA
Input Sensitivity (Rated Output -20 dB)	MIC: -70 to -42.5 dB* (adjustable) LINE: -20 to +7.5 dB* (adjustable) MIC or LINE selectable by the built-in switch
Low Cut Filter (100 Hz)	9 to 15 dB attenuation (adjustable)
High Cut Filter (10 kHz)	8 to 14 dB attenuation (adjustable)
Distortion	Under 0.5%
Frequency Response	50 - 20,000 Hz
Phantom Power	15 V (open), 6 V (current consumption: 3.3 mA)
Control Input	No-voltage make contact, open voltage: 17 V DC, short-circuit current: Under 5 mA
Input Connector	RJ45 female connector Twisted-pair straight cable (TIA/EIA-568A standard)
Finish	Panel: Aluminum, hairline
Dimensions	35 (W) × 78 (H) × 88 (D) mm
Weight	70 g
Accessory	Mounting screw.....2
Option	Isolation transformer: IT-450
Applicable Model	VX-2000


APPEARANCE

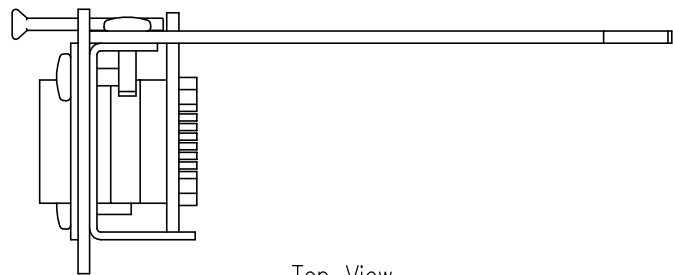

Top View

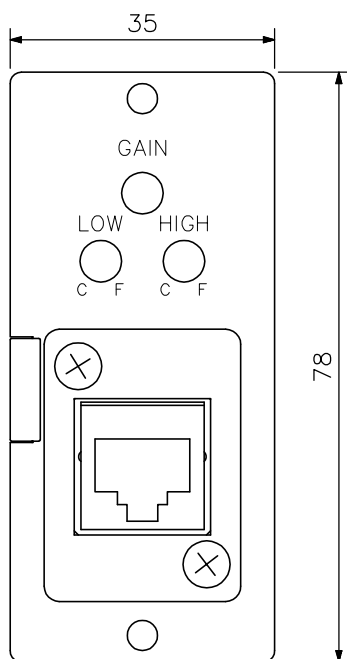

Front View

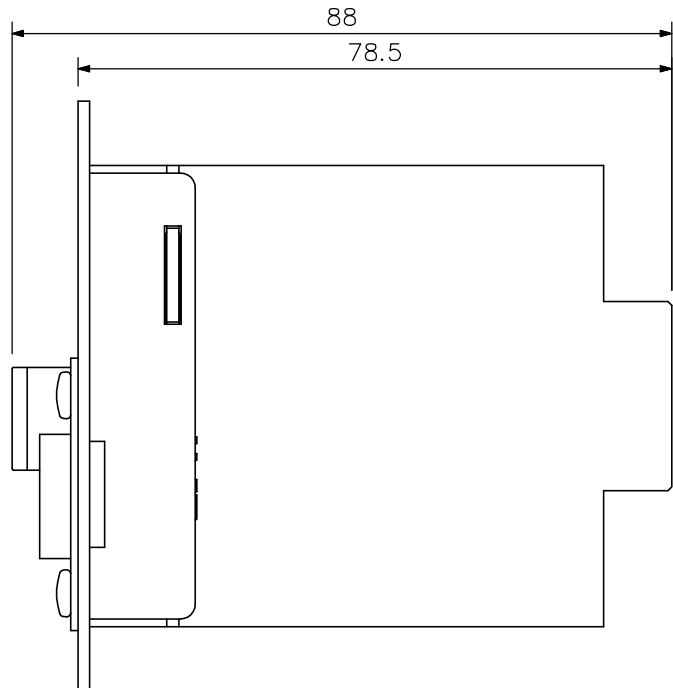

Side View

UNIT: mm SCALE: 1/1