

DESCRIPTION

Featuring the line arrayed wave front control technology that creates sound fields with uniform sound pressure and high sound clarity, the SR-A12S is a two-way line array speaker ideal for short distance sound transmission.



The SR-A12S employs the multi-amplifier drive system.

Recommended digital speaker processor is the DP-SP3 (option).

SPECIFICATIONS

Enclosure	Bass-reflex type
Power Handling Capacity	Continuous program Low frequency: 450 W, High frequency: 180 W
Rated Impedance	Low frequency: 8 Ω , High frequency: 16 Ω
Sensitivity	Low frequency: 98 dB (1 W, 1 m), High frequency: 109 dB (1 W, 1m)
Frequency Response	50 Hz - 20 kHz (when recommended parameters are applied by the optional DP-SP3)
Crossover Frequency	1 kHz (when recommended parameters are applied by the optional DP-SP3)
Directivity Angle	Horizontal: 90°, Vertical: 15°
Speaker Component	Low frequency: 30 cm cone-type High frequency: Wave front control horn 90° (horizontal) \times 15° (vertical) + compression driver \times 2
Input Connector	M4 screw terminal, distance between barriers: 10 mm and Neutrik NL4MPXX \times 2
Finish	Enclosure: Plywood, black, paint Front grille: Punched steel plate, black, acrylic paint
Dimensions	740 (W) \times 433 (H) \times 467 (D) mm
Weight	47 kg (including accessories)
Accessory	Joint plate \times 2, Joint plate mounting bolt (M10) \times 16
Option	Rigging frame: SR-RF12 Digital speaker processor: DP-SP3

APPEARANCE

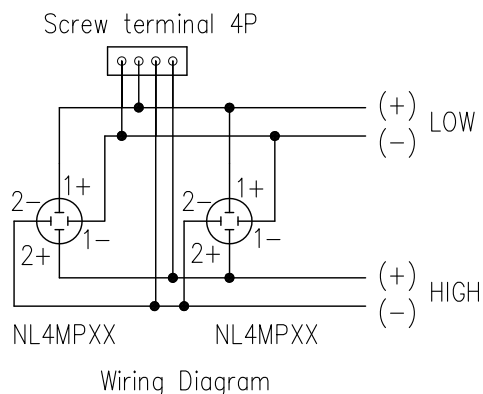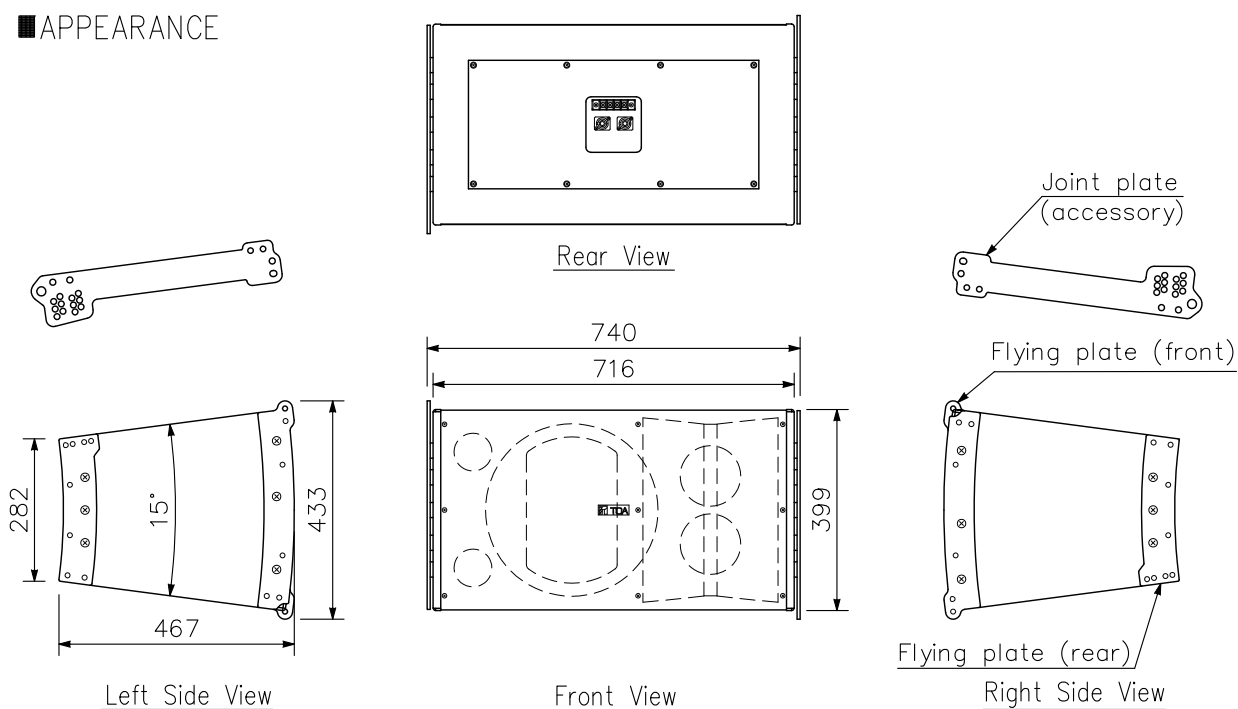

UNIT:mm SCALE:1/15