


DESCRIPTION

The SR-S4L is a two-way line array speaker ideal for long distance sound transmission and configures a line array by arranging speaker elements vertically close to each other. It can be converted into the bi-amplifier drive system by changing the internal connection. It can be used for high-impedance applications with the installation of the optional MT-S0601 Matching transformer.

SPECIFICATIONS

Enclosure	Bass-reflex type
Power Handling Capacity	Continuous program: 600 W (single-amp mode) Low 240 W, High 240 W (bi-amp mode)
Rated Impedance	8 Ω (single-amp mode) Low 8 Ω , High 8 Ω (bi-amp mode)
Sensitivity	94 dB (1 W, 1 m)
Frequency Response	70 Hz – 20 kHz (when recommended parameters are applied by the optional DP-SP3)
Crossover Frequency	3.5 kHz
Directivity Angle	Horizontal: 90°, Vertical: 0° (within the range of speaker height)
Speaker Component	Low frequency: 10 cm cone-type \times 8 High frequency: 2.5 cm balanced dome-type \times 24
Input Connector	M4 screw terminal, distance between barriers: 10 mm and Neutrik NL4MPXX \times 2
Finish	Enclosure: MDF, white, paint Front grille: Punched steel plate, white, acrylic paint
Dimensions	160 (W) \times 895 (H) \times 255 (D) mm
Weight	16 kg
Accessory	Bi-amplifier drive rating label ...1, Bi-amplifier drive input indication label ...1
Option	Matching transformer: MT-S0601, Extension plate: SR-EP4, Flying bracket: SR-FB4, Wall mounting bracket: SR-WB4, Wall tilt bracket: SR-TB4, Stand adapter: SR-SA4, Protection pad: SR-PP4, Floor stand: SR-FS4, Digital speaker processor: DP-SP3

APPEARANCE

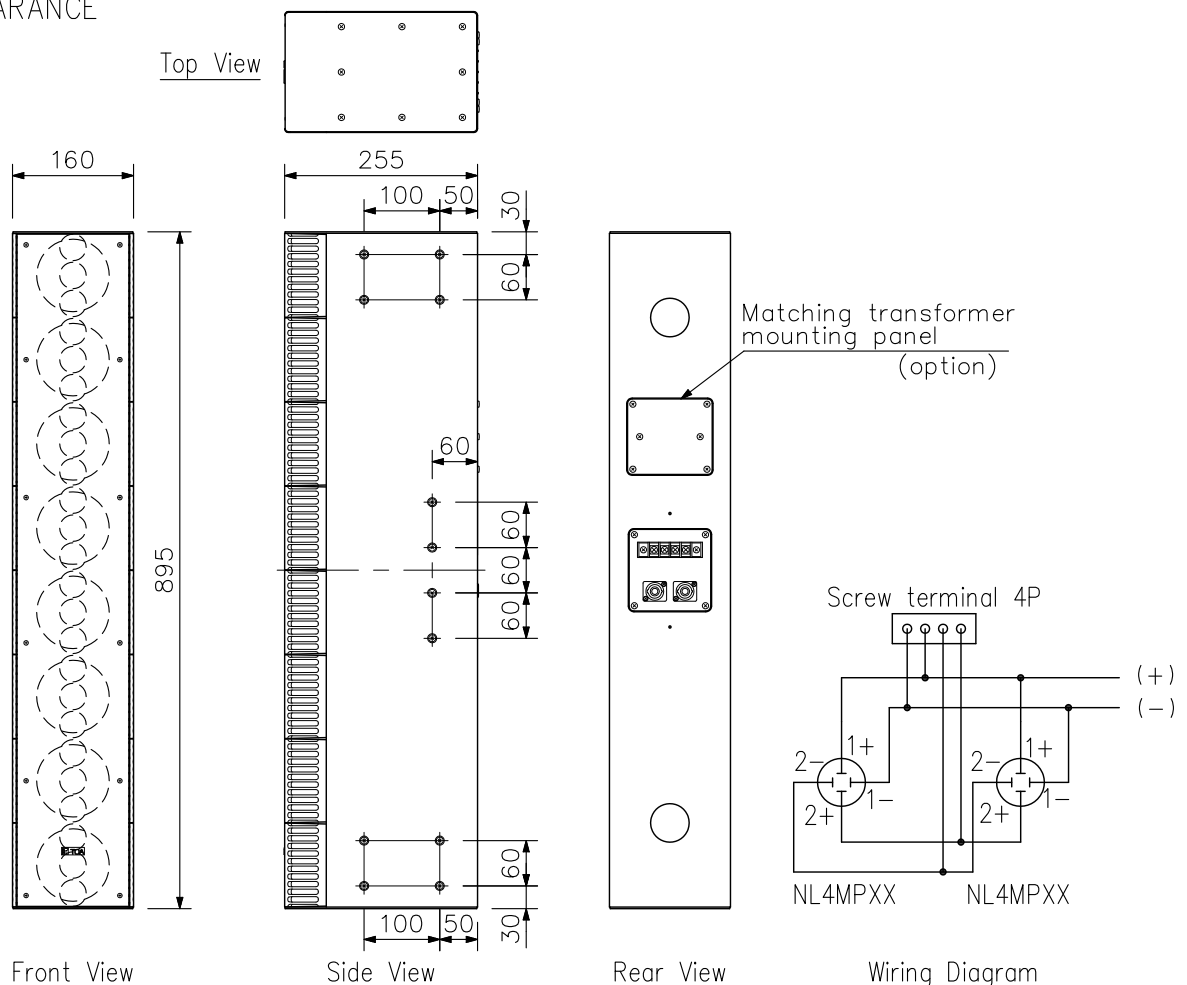

UNIT:mm SCALE:1/10