

# MICROPHONES

## TS-773 TS-774


Thank you for purchasing TOA's Microphones.

Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.

### 1. GENERAL DESCRIPTION

The TS-773 and TS-774 Microphones are designed for exclusive use with the Chairman and Delegate units of TOA Conference system. A ring indicator light at the microphone head shows the operation status of the Chairman or Delegate unit.

### 2. INSTALLATION

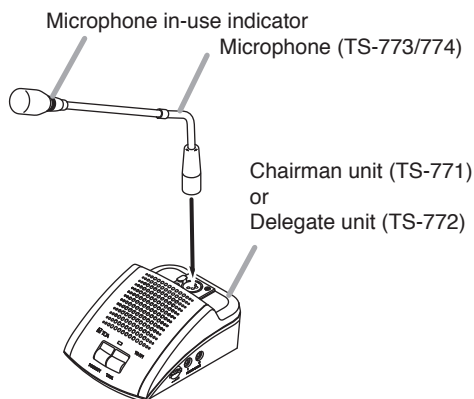

### 3. SPECIFICATIONS

Model No.	TS-773	TS-774
Type	Electret condenser microphone	
Directivity	Unidirectional	
Rated Impedance	1.8 k $\Omega$	
Rated Sensitivity	-37 dB (1 kHz, 0 dB = 1 V/Pa)	
LED Indicator	Speech indicator (ring type)	
Frequency Response	100 Hz – 13 kHz	
Output Connector	Equivalent to XLR-4-12C	
Finish	Gooseneck: Stainless steel, black Other: ABS resin, black	
Length	360 mm (14.17")	515 mm (20.28")
Weight	90 g (0.2 lb)	105 g (0.23 lb)
Applicable Unit (Option)	TS-771 Chairman unit, TS-772 Delegate unit	

**Note:** The design and specifications are subject to change without notice for improvement.