

DESCRIPTION


The A-2030 is a high cost-performance mixer power amplifier suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.

SPECIFICATIONS

* 0 dB = 1 V

Power Source	220 - 240 V AC, or 24 - 30 V DC
Rated Output	30 W
Power Consumption	34 W (EN60065), 78 W (AC operation at rated output), 2 A (DC operation at rated output)
Frequency Response	50 Hz - 20 kHz (± 3 dB)
Distortion	Under 1% at 1 kHz, 1/3 rated power
Input	MIC 1 - 3: -60 dB*, 600 Ω , balanced, phone jack AUX 1,2: -20 dB*, 10 k Ω , unbalanced, RCA pin jack
Output	Speaker out: Balanced (floating) High impedance: 330 Ω (100 V), 170 Ω (70 V) Low impedance: 4 Ω (11 V) Rec out: 0 dB*, 600 Ω , unbalanced, RCA pin jack
Phantom Power	DC +21 V (MIC 1)
S/N Ratio	Over 60 dB
Tone Control	Bass: ± 10 dB at 100 Hz Treble: ± 10 dB at 10 kHz
Muting	MIC 1: Mutes other input signals by 0 - 30 dB attenuation
Indicator	Power, signal, peak
Finish	Panel: ABS resin, black Case: Steel plate, black
Dimensions	420 (W) \times 100.9 (H) \times 280.3 (D) mm (16.54" \times 3.97" \times 11.04")
Weight	5 kg (11.02 lb)

APPEARANCE

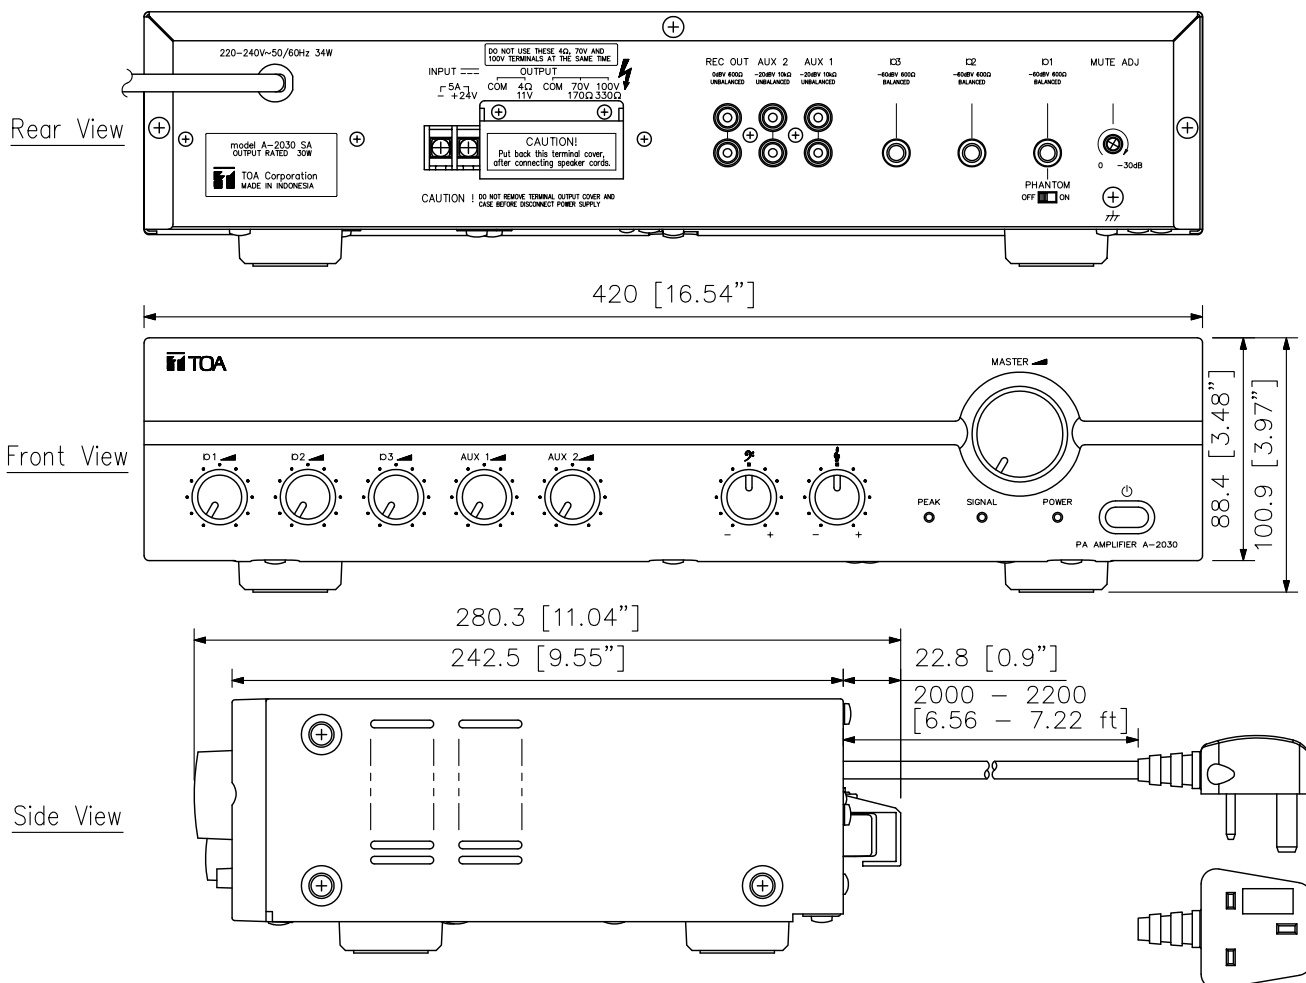

UNIT:mm SCALE:1/3