

## BRIDGING TRANSFORM MODULE

B-21S


## ■DESCRIPTION

The B-21S is a line module to be used in conjunction with the 900 series or AX-1000 amplifier. It has a balanced input and can be remotely controlled.

## ■ SPECIFICATIONS

Power Source	24 VDC
Current Consumption	Less than 27 mA
Input Sensitivity (Rated Output 1 V )	0.9 — 10 V (adjustable)
Noise Output (20 Hz - 20 kHz BPF)	Less than 50 $\mu V$
Distortion	Less than 0.05 %
Frequency Response	20 Hz - 20 kHz
Remote Volume Control	More than 55 dB
Input Connector	5P screw terminal
Output Connector	6P card edge—connector
Dimensions	35 (W) × 78 (H) × 88 (D) mm
Weight	90 g

## **APPEARANCE**

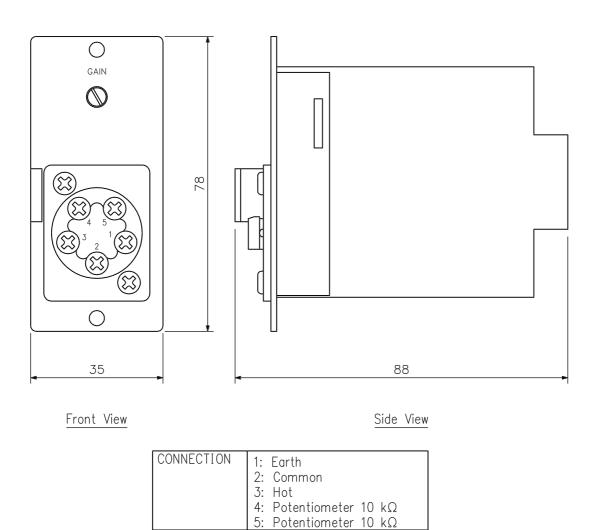

UNIT: mm

SCALE: 1/1