


DESCRIPTION

Employing an internal FM sound source, the ML-301B plays back Westminster chime as a time signal at times preset by timer. It also sounds a four-tone chime as a paging pre-announcement tone.

SPECIFICATIONS

Power Requirements	AC mains, 50/60 Hz
Power Consumption	4 W
Output	0 dBV, 600 Ω , Unbalanced
Control System	Microprocessor control
Tone Generator	Frequency modulation
Programs	Westminster 22 s~46 s (adjustable 10 steps) 4-tone chime (440,554,659 and 880 Hz $\pm$ 5%)
Activation	Front switch or remote control
Remote	Make contact $\times$ 1, Capacity of contact DC 24 V 0.5 A
Operating Temperature	0 $^{\circ}$ C~+50 $^{\circ}$ C
Color	Panel : Black
Dimensions(W×H×D)	420 (16.54")×47.5 (1.87")×246.5 (9.70") mm
Weight	2.4 kg (5.29 lb.)
Accessories	AC power supply cord (2 m)---1 Connection cord (2 m) with phone plug---1
Optional Accessory	Rack mounting bracket (MB-15B)

APPEARANCE

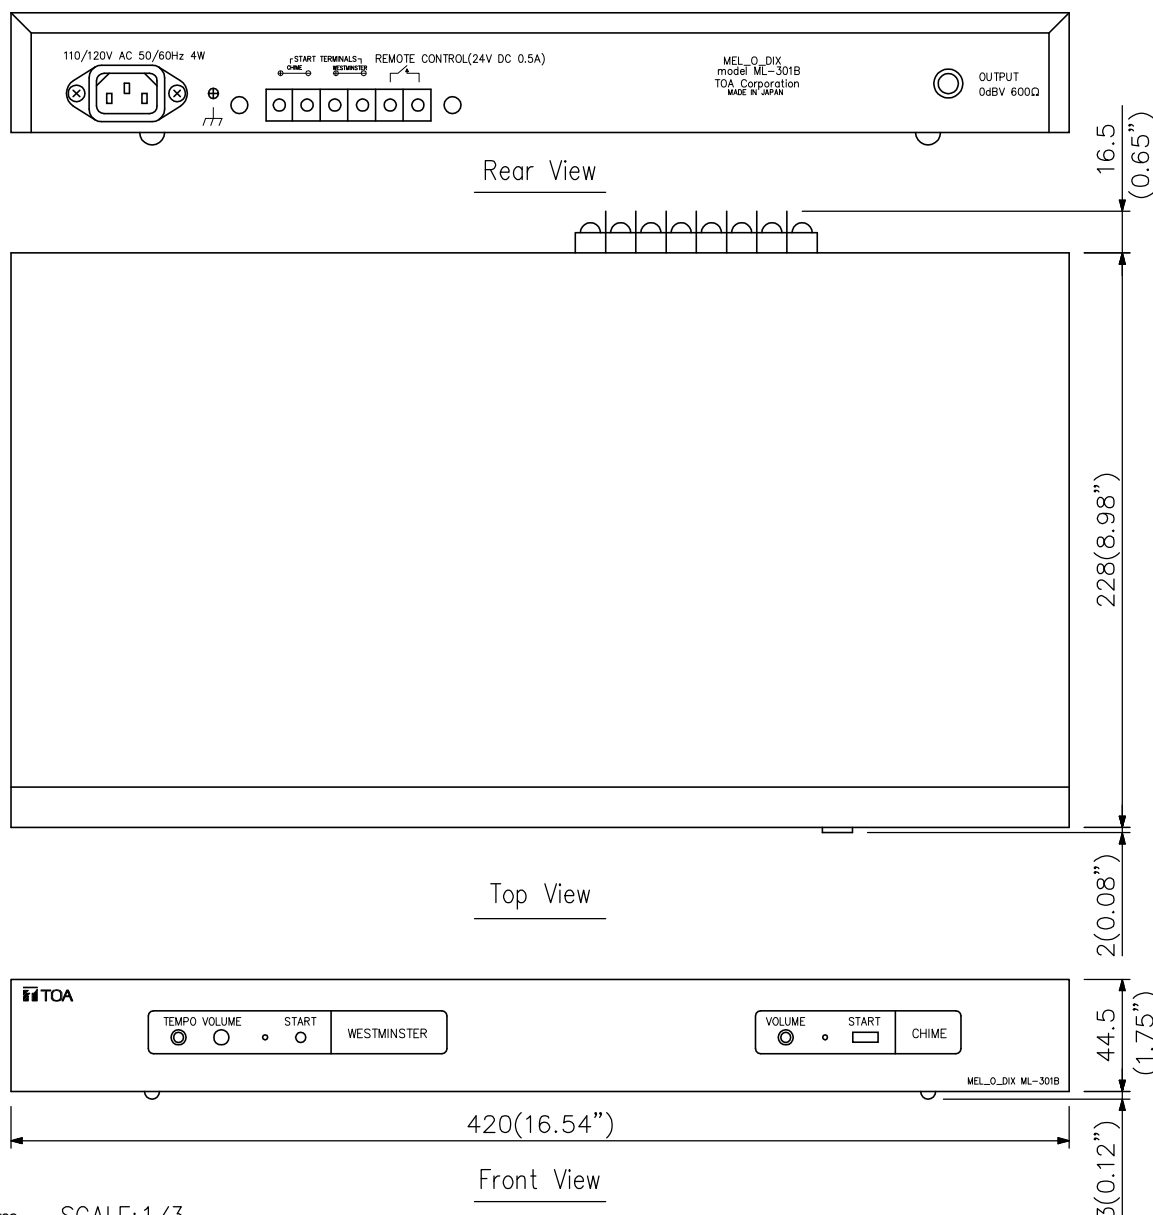

UNIT:mm SCALE: 1/3