

## DESCRIPTION


The PE-604WU is a pendant speaker designed for the installations suspended from a ceiling. A directly-attached 5 m (16.4 ft) hanging wire allows the speaker to be suspended from high ceilings. The PE-604WU is driven on both high-impedance (100 V, 70 V and 25 V) and low-impedance (8 Ω) lines. The input power (impedance) can be easily changed at the upper side of the speaker. The PE-604WU is certified to UL 1480 UUMW and ULC-S541 standards. Using the supplied GRIPPLE® hangers will facilitate the speaker mounting height adjustment.

## SPECIFICATIONS

|                       |  |
|-----------------------|--|
| Enclosure             | Bass-reflex type   |
| Rated Input           | 60 W (100 V, 70 V line, 8 Ω), 7.5 W (25 V line)  |
| Rated Impedance       | 100 V line: 170 Ω (60 W), 330 Ω (30 W), 670 Ω (15 W), 3.3 kΩ (3 W)<br>70 V line: 83 Ω (60 W), 170 Ω (30 W), 330 Ω (15 W), 670 Ω (7.5 W), 3.3 kΩ (1.5 W)<br>25 V line: 83 Ω (7.5 W), 170 Ω (3.7 W), 330 Ω (1.9 W), 670 Ω (0.9 W), 3.3 kΩ (0.2 W)<br>Low impedance: 8 Ω                    |
| Sensitivity           | 90 dB (1 W, 1 m) (330 Hz – 3.3 kHz, pink noise)  |
| Frequency Response    | 110 Hz – 20 kHz (–10 dB)   |
| Speaker Component     | 12 cm (5") cone-type + balanced dome-tweeter (coaxial)   |
| UL Code               | UL 1480 UUMW, ULC-S541   |
| Operating Temperature | –10 °C to +50 °C (14 °F to 122 °F)   |
| Finish                | Enclosure: ABS resin, white (RAL 9010 equivalent)<br>Grille: Surface-treated steel plate mesh, white (RAL 9010 equivalent), paint  |
| Dimensions            | ø186 × 275 (H) mm (ø7.32" × 10.83") (unit only)  |
| Weight                | 2.9 kg (6.39 lb) (unit only)   |
| Accessory             | GRIPPLE® No.1 ...1, GRIPPLE® No.2 ...1, Release key (for GRIPPLE®)...1,<br>Safety wire (ø1.5 mm (ø0.06")) ...1, Hanging wire (ø2 mm (ø0.08")) ...1,<br>Speaker Cable (4-core FPL listed cable 4.6 m (15.09 ft)) ...1<br>※ GRIPPLE® No.1 and No.2 are hangers for suspending the speaker. |

## APPEARANCE

※ GRIPPLE® is a registered trademark of Gripple Limited, England.

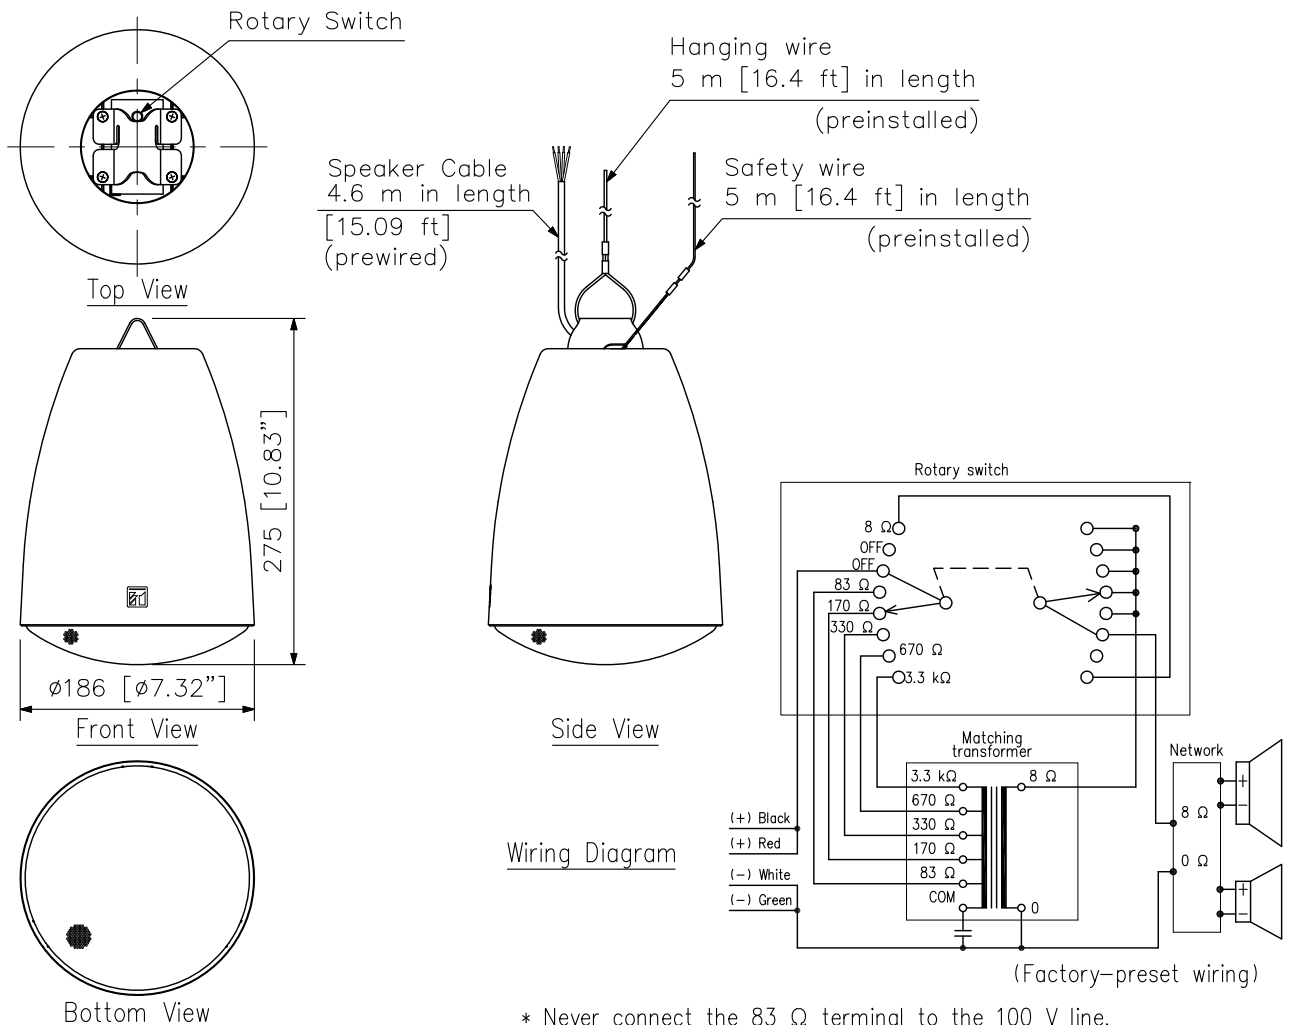

- \* Never connect the 83 Ω terminal to the 100 V line.
- \* Never connect the 8 Ω terminal to the 100 V or 70 V or 25 V line.

UNIT:mm SCALE:1/6