


DESCRIPTION

The BS-1110W Speaker is specifically designed to reproduce clear announcements. The speaker also features a wide horizontal directivity owing to the vertical arrangement of speaker units, distributing announcements to a wider area.

SPECIFICATIONS

Rated Input	10 W
Rated Impedance	100 V line: 1 k Ω (10 W), 2 k Ω (5 W) 70 V line: 500 Ω (10 W), 1 k Ω (5 W) 4 Ω (10 W)
Sound Pressure Level	92 dB (1 W, 1 m)
Frequency Response	150 Hz – 14 kHz
Speaker Component	12 cm cone-type $\times$ 2
Applicable Cables	600 V vinyl-insulated cable (IV wire or HIV wire) Solid copper wire: ϕ 0.8 – ϕ 1.2 mm 7-core twisted copper wire: 0.75 – 1.25 mm ²
Connection	Push-in connector (Bridging connections possible)
Operating Temperature	–10 $^{\circ}$ C to +50 $^{\circ}$ C
Finish	Enclosure: Plywood vinyl coating, white (RAL9010 PURE WHITE) Front: ABS resin, white (RAL9010 PURE WHITE), paint Rear: Steel plate, white (RAL9010 PURE WHITE), paint
Dimensions	180 (W) $\times$ 360 (H) $\times$ 100 (D) mm
Weight	2.9 kg (unit only)
Accessory	Mounting bracket $\times$ 2
Option	Applicable bracket: YS-301, SP-410, WCB-13W Applicable stand: ST-16A

APPEARANCE

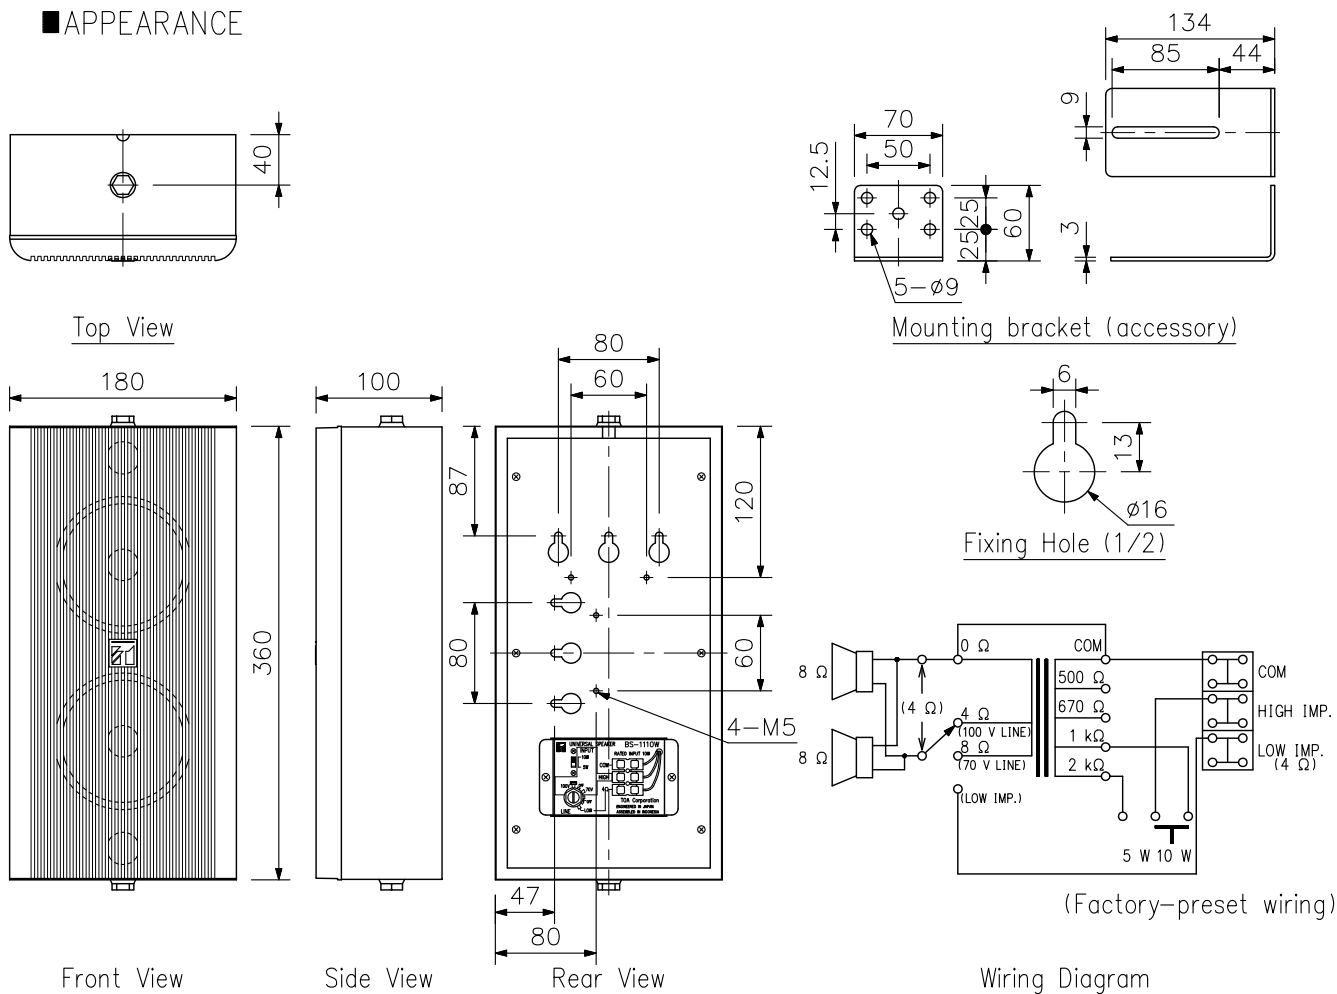

UNIT:mm SCALE:1/6