



BS-301 COMPACT SATELLITE SPEAKER SYSTEM



***Ready-To-Install BGM Speakers Featuring
Compact Cubic Design with Versatile Sound***


BS-301 Compact Satellite Speaker System

BS-301 Compact Satellite Speaker System can produce effective acoustic sounds in commercial spaces like restaurants, cafes, and retail stores.

There are 4 small satellite speakers that conform to the design of the commercial space, and can be installed using metal fittings attachments to produce suitable acoustic sounds even in complex spaces.

In addition, the subwoofers, which can be temporarily or permanently installed, are capable of reinforcing the projection of ideal acoustic sounds.

INSTALLATION

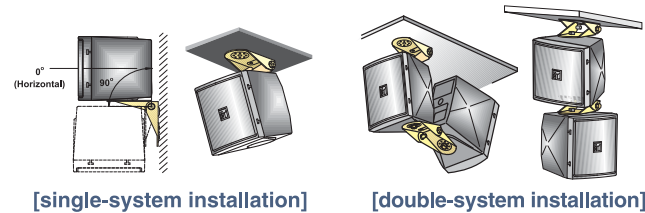

Features

- Consists of a set of 4 satellite speakers and a subwoofer, which are individually fitted with its own mounting brackets.
- Available in two colors (black or white), which can be selected to suit the room interior.
- Compact and highly efficient in performance.
- The mounting brackets fitted onto the satellite speakers can be for 1 speaker or 2 speakers installation.
- Horizontal and vertical angles can be easily adjusted during installations onto ceilings or walls.

ACCESSORIES

• For BS-301B/W Speaker

• For FB-601B/W Subwoofer



Indoor use only

Available in Black or White color

Various Mounting Brackets

Accessory brackets can be used for many different types of installations, such as mounting on the walls, ceilings, single or double-system installations and more. Flexible installation is made possible and space can be fully utilized.

SPECIFICATION

COMPACT SATELLITE SPEAKER SYSTEM	BS-301B AS	BS-301W AS
Total Input	120W / CH x 2	
Rated Impedance	6Ω / CH x 2	
Sensitivity	83dB (Pink noise 330 ~ 3,300 Hz, 1W, 1M) L ch or R ch. only + 2 satellite	
Frequency Response	40 ~ 20,000 Hz (L or R ch Subwoofer + 2 satellite)	
Speaker Feature	Subwoofer (FB-601B/W AS)1pc Satellite speaker (BS-S20B/W AS)4pc	
Mounting	Floorstanding / on-wall / on ceiling	
Input Connector	Push-in terminals	
Total Weight	13.9 kg (without bracket)	

■ SUBWOOFER *		FB-601B AS	FB-601W AS
Sensitivity		85dB (1W, 1M) (L ch or R Channel)	
Frequency Response		40 ~ 190 Hz (-10dB below SPL) (L ch or R Channel)	
Speaker Component		16cm (6") 2-Speaker	
Connection		Push-in Terminals (8 connected terminal poles)	
Feature	Speaker Cabinet	Particle board with vinyl, black	Particle board with vinyl, white
	Front Cover	ABS Resin (Black)	ABS Resin (White)
	Speaker Bracket	Steel plate, black paint	Steel plate, white paint
Dimensions		210 (w) x 390 (h) x 563 (d) mm	
Weight		11.5kg (without bracket)	
Accessories		Rubber Foot.....4	
		Speaker Mounting Bracket.....4	
		Taping Screws 3 x 144	

*Subwoofer can be purchased separately

Subwoofer can be purchased separately.

■ SATELLITE SPEAKER ^		BS-S20B AS	BS-S20W AS
Sensitivity		85dB (Pink noise 330 ~ 3,300 Hz, 1W, 1M)	
Frequency Response		150 ~ 20,000 Hz (-20dB below SPL)	
Speaker Component		8cm (3") cone-type	
Connection		Push-in Terminals (2 connected terminal poles)	
Feature	Speaker Cabinet	HIPS Resin (Black)	HIPS Resin (White)
	Front Cover		
	Speaker Bracket	Steel plate, black paint	Steel plate, white paint
Dimensions		92 (w) x 97.5 (h) x 100 (d) mm	
Weight		600g (without bracket)	
Accessories		Speaker Bracket.....1	
		Hexagonal bolts M5 x 12 (with ring and spring ring).....2	

^ Satellite speaker can be purchased separately in a set of 2 satellite speakers



Human Society with
Sound & Communication

TOA Electronics Pte Ltd
www.toa.com.sg

Specifications are subject to change without notice.
Printed in Singapore (1210) 833-61-027-6B