

DESCRIPTION


The JP-034 is a ten-zone junction panel designed for general-purpose public address applications. It is used for connecting equipment of the inside and outside of an equipment rack, and supplies power to individual equipment.

SPECIFICATIONS


Power Source	AC mains 50/60 Hz
Power Consumption	55 W
DC Power Output	24 V DC, 1.5 A max.
AC Power Output	Switched outlets × 8 Per-outlet capacity: 700 W Total power capacity: 1.4 kW Unswitched outlets × 5 Per-outlet capacity: 700 W Front-mounted outlet: 100 W Total power capacity: 700 W
Speaker Lines	R1 - 5: 2 terminals / R6 - 10: 2 terminals C1 - 5: 2 terminals / C6 - 10: 2 terminals / N: 10 terminals Up to 200 W per line (100 V line) / 140 W per line (70 V line) M3.5 screw terminal, distance between barriers: 9 mm
External Control Output	Remote 1, Chime 1, Emergency cut-off 20 V 1 M4 screw terminal, distance between barriers: 9 mm
External Control Input	Timer 1, Chime 1, AUX control 1, All-zone control 1 M4 screw terminal, distance between barriers: 9 mm
Finish	Panel: Surface-treated steel plate, black, 30% gloss, paint
Dimensions	482 (W) × 132.6 (H) × 315.3 (D) mm
Weight	8.2 kg
Accessory	Cable connecting between JP-034 and PP-025B 1, Cable connecting between JP-034 and RF-011 1, Rack mounting bracket (preinstalled on the unit) 2, Rack mounting screw (with washer) ... 4, Fuse: 1.6 A ... 1, 2 A ... 1, 3 A ... 1

APPEARANCE


Rear View

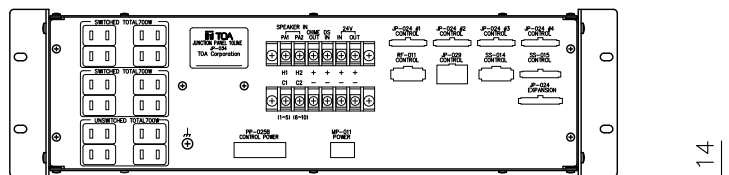


Top View

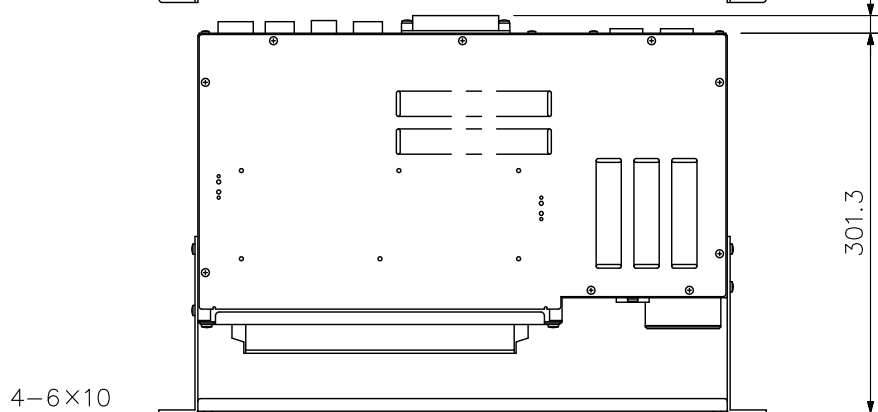

Front View

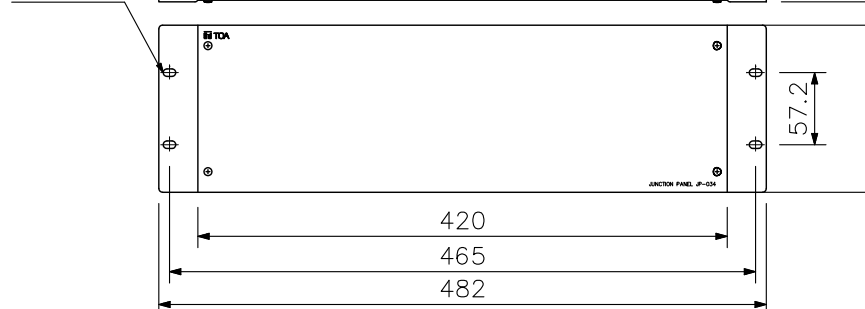

JP-034 without the front cover

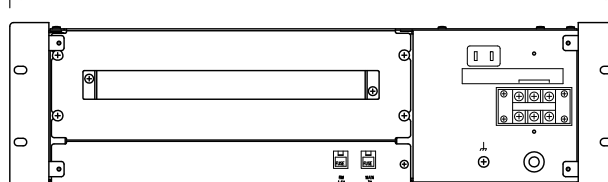

UNIT:mm SCALE:1/6