

STANDARD MICROPHONE LONG MICROPHONE

TS-D1000-M1 TS-D1000-M2

Thank you for purchasing TOA's Microphone.

Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.

1. GENERAL DESCRIPTION


TOA's TS-D1000-M1 and TS-D1000-M2 Microphones are dedicated components of the Digital conference system's Chairman unit and Delegate unit. Their mic heads are equipped with illuminated display rings that allow the status of the units in use to be monitored at a glance.

3. SPECIFICATIONS

Model No.	TS-D1000-M1	TS-D1000-M2
Type	Electret condenser microphone	
Directivity	Unidirectional	
Rated Impedance	1.4 kΩ	
Rated Sensitivity	-37 dB (1 kHz, 0 dB = 1 V/Pa)	
LED Indicator	In-use indicator (ring type), Red	
Frequency Response	100 Hz to 13 kHz	
Output Connector	Equivalent to XLR-3-12C	
Operating Temperature	0 to 40 °C (32 to 104 °F)	
Operating Humidity	90%RH or less (no condensation)	
Finish	Shaft: Brass, black Other: ABS resin, black	
Length	518 mm (1.7 ft)	668 mm (2.19 ft)
Weight	110 g (0.24 lb)	125 g (0.28 lb)
Applicable Unit	Chairman unit: TS-D1000-CU Delegate unit: TS-D1000-DU	

2. INSTALLATION

TS-D1000-M1
Standard microphone
or
TS-D1000-M2
Long microphone

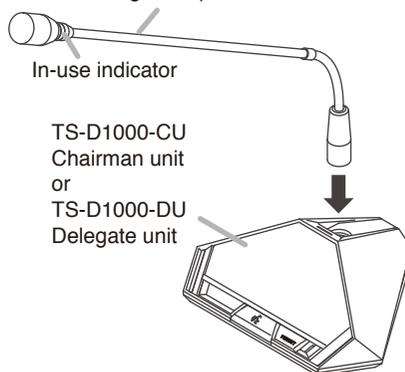

Note: The design and specifications are subject to change without notice for improvement.

Traceability Information for Europe

TOA Electronics Europe GmbH
Suederstrasse 282, 20537 Hamburg, Germany