


DESCRIPTION

The TS-702 is a delegate unit for the TS series conference systems. Placing the speech button in the ON position permits speech and disables the speaker to prevent feedback. If the speech button is placed in the OFF position, the microphone cannot be used but the speaker is turned on, allowing the voices from other conference units to be monitored. The TS-702 is small in size, and can be easily installed and put away after use.

SPECIFICATIONS

Power Requirements	35 VDC, under 30 mA supplied from center amplifier
Input	Gooseneck Microphone: Unidirectional back electret condenser microphone, -60 dBV, with LED, detachable type Line : 0 dBV, unbalanced, 8P mini socket
Output	Recording : 10 k Ω , -20 dBV, unbalanced, mini-jack Line : 0 dBV, unbalanced, 8P mini socket Internal Speaker : 130 Ω , 200 mW
Speech Control	Microphone, speaker on-off control by speech switch
Operating Temperature Range	0 °C - +40 °C
Finish	Base : ABS resin, semi-mat black Speaker: Metallic brown
Dimensions	170 (W) × 59 (H) × 147 (D) mm (microphone excluded)
Weight	560 g (without connection cord)
Accessory	Connection cord 1m × 2 m (with 2 × 8P mini plugs and 1 × 8P mini socket) ... 1

APPEARANCE

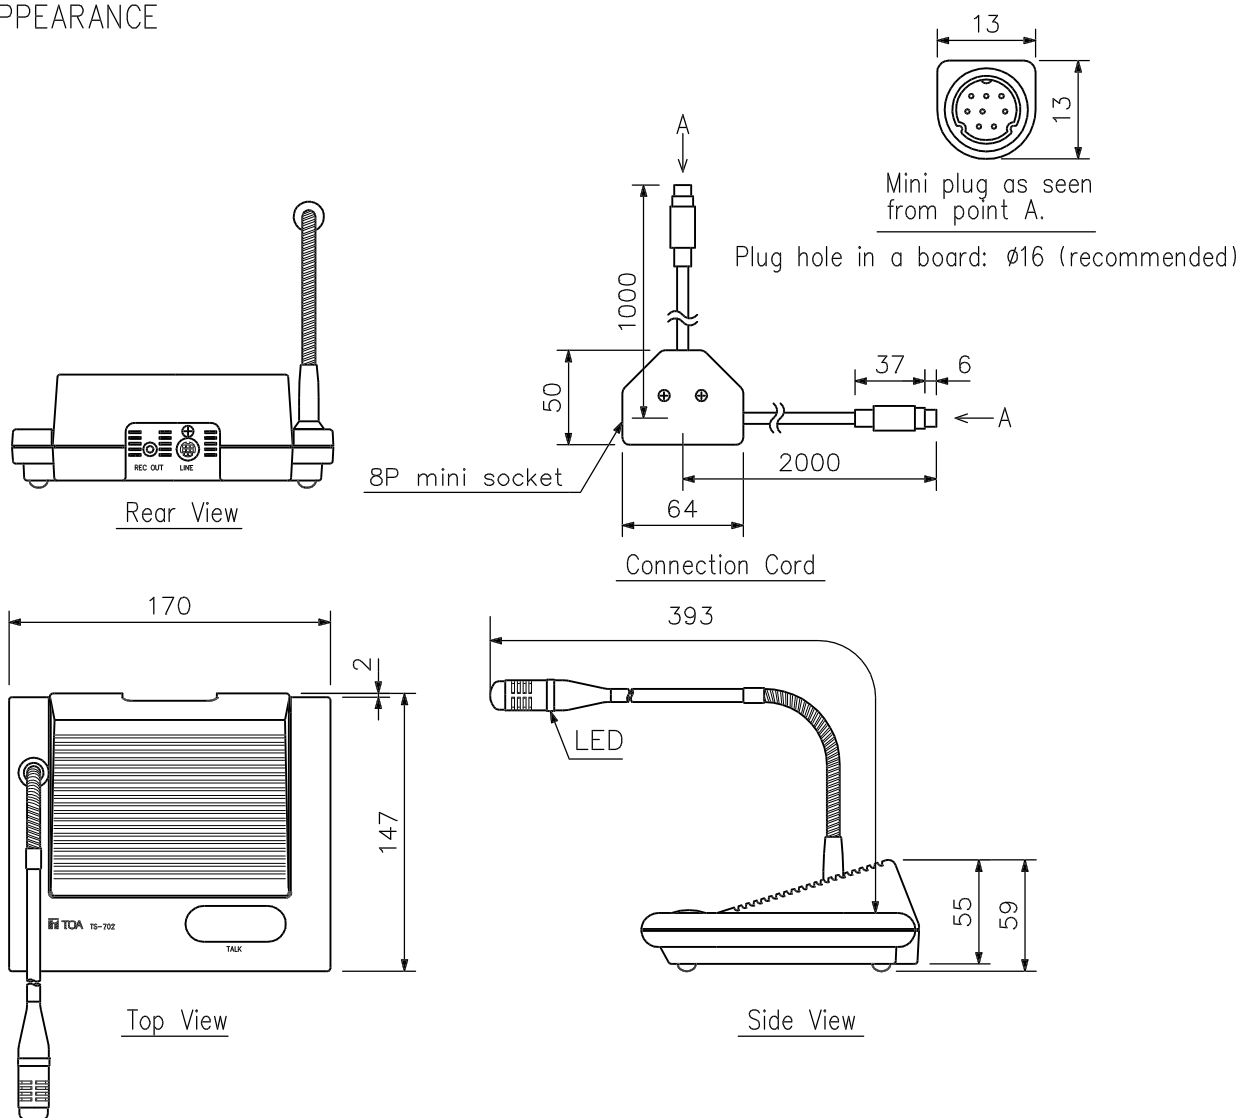

UNIT:mm SCALE:1/4