

DESCRIPTION


The D-921F is a 2-channel microphone/line input module designed for use with the D-901 Digital Mixer, etc. It is equipped with XLR connectors. Input sensitivity and phantom power setting can be performed at the main frame such as the D-901.

SPECIFICATIONS

* 0 dB = 0.775 V

Input	2 channels, Mic/Line changeable Mic: -50/-36 dB*, 4.7 kΩ, electronically-balanced, equivalent to XLR-3-31 type Line: -10/+4 dB*, 10 kΩ, electronically-balanced, equivalent to XLR-3-31 type Phantom power supply (can be used when set for the microphone) 15 V: D-901 (option), DP-K1 (option), D-2008SP (option) 12 V: SX-2100AI (option) Ground lift switch
A/D Converter	24 bit
Sampling Frequency	48 kHz
Frequency Response	20 Hz - 20 kHz, ±1 dB (+4 dB* input)
Dynamic Range	100 dB (IHF-A weighted) or more (+4 dB* input)
Total Harmonic Distortion	0.05 % or less (+4 dB* input)
Finish	Panel: Pre-coated steel plate, black, 30 % gloss
Dimensions	35 (W) × 119.5 (H) × 178.4 (D) mm
Weight	150 g

APPEARANCE

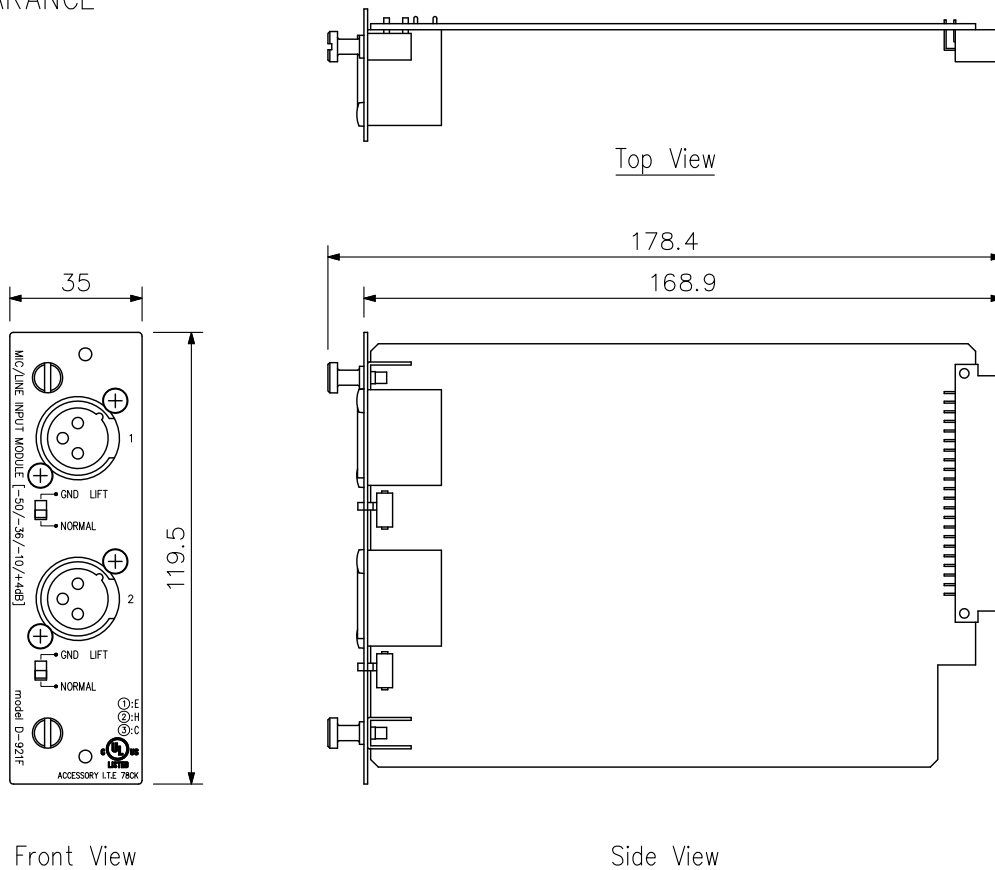

UNIT: mm SCALE: 1/2