

DESCRIPTION


The P-924MK2 Power Amplifier delivers up to 240 watts (Direct)/220 watts (Transformer) of output power.  
The power amplifier has an input port to accept one plug-in module.

SPECIFICATIONS


Type	Power amplifier
Power Requirement	AC mains, 120 V, 60 Hz
Power Consumption	120 V / 3 A
Output Power	(D) 240 W RMS (T) 220 W RMS
Power Band Width	(D) 20 - 20,000 Hz, 0.5 % THD (T) 50 - 20,000 Hz, 0.5 % THD
Frequency Response	(D) 20 - 20,000 Hz, ±1 dB (T) 20 - 15,000 Hz, ±1 dB, (T) 20 - 20,000 Hz, +1 dB, -3 dB
T.H.D	0.01 % at 1 kHz, rated output
Inputs	One Input Port: Port accepts any input module expect T-01. One Direct Input * Use of direct input prohibits use of modular input port.
Input Sensitivity / Impedance	Input Port: 100 mV or 1000 mV (switchable)/10 kΩ Direct Input: 100 mV or 1000 mV (switchable)/10 kΩ
Outputs(T)=Transformer (D)=Direct	Main (T): 8 Ω, 25 and 70 volts, balanced Main (D): 4 Ω, unbalanced
Output Regulation(1kHz)	(D) Less than 0.5 dB, no load to full load (T) Less than 1.0 dB, no load to full load
S/N Ratio(Band Pass 20-20,000Hz)	Input level switch in 0 dBV (1000 mV) position: 108 dB Input level switch in -20 dBV (100 mV) position: 90 dB
Controls	1 Input gain control      1 Input level switch 1 Power ON/OFF switch    1 Low-Cut switch
Indicators	1 Power LED, 1 Protect LED, 1 Signal LED, 1 Normal LED, 1 Peak LED
Protection	Self-protection, with 2AC fuses and 2DC fuses (inside)
Connectors	Input: Card-edge connector and screw-terminal strip Output: Screw-terminal strip AC outlet: 3-pin grounding type AC power cord/plug: SJT, 3-prong type
Temperature Range	-10 °C to +60 °C
Finish	Black
Dimensions	420 (W) x 151.3 (H) x 334.2 (D) mm
Weight	19.5 kg
Accessory	Volume control cover (YA-920).....1
Option	Rack mounting bracket (MB-35B)

APPEARANCE


Rear View

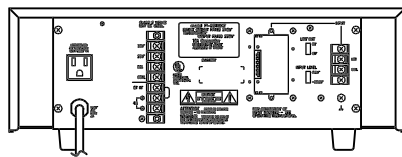


Top View

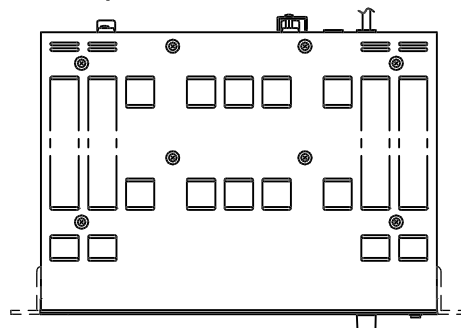

Side View

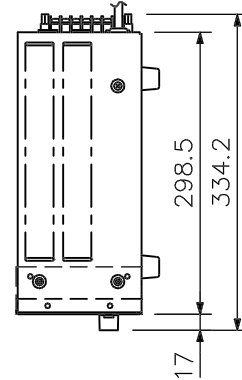

Front View

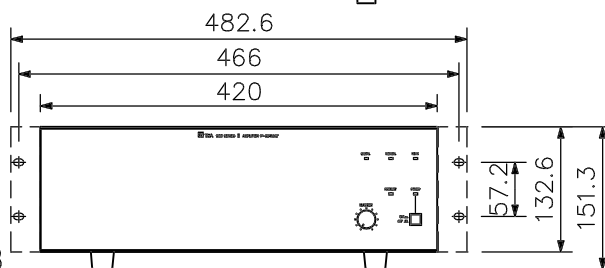

UNIT:mm SCALE:1/8