

DESCRIPTION

The TRANTEC Wireless Antenna Distributor S5-ADU is designed to be used in conjunction with a UHF band system for sound reinforcement applications. It comes with 2 channels, in which a single antenna signal is distributed to 5 outputs.

SPECIFICATIONS

Power Source	AC mains, 50/60 Hz (supplied AC adapter must be used)
Current Consumption	300 mA (12 V DC)
Frequency Range	UHF(*1)
Distribution Channel	2 channels
Antenna Input	1 input, 50 Ω, BNC (phantom powering of 9 V DC/25 mA for antenna)
Antenna Output	4 outputs and 1 link output, 50 Ω, BNC
Indicator	Power lamp
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Finish	Front panel: Anodized aluminum, silver Case: Steel plate, dark gray, painting
Dimensions	210 (W) × 46.4 (H) × 201.2 (D) mm (8.27" × 1.83" × 7.92")
Weight	1.3 kg (2.87 lb)
Accessory	AC adapter(*2) ×1, BNC cable (50 cm (1.64 ft), for connection) ×10


(*1)

Band	Frequency Range
G	606 - 638 MHz, UHF
B	722 - 752 MHz, UHF

(*2)


Version	AC adapter
A	240 V AC, 50 Hz
W	Not supplied

APPEARANCE

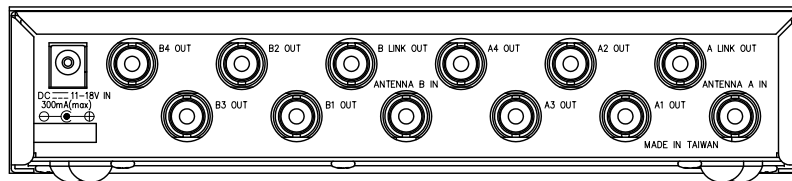

Rear View


210 [8.27"]

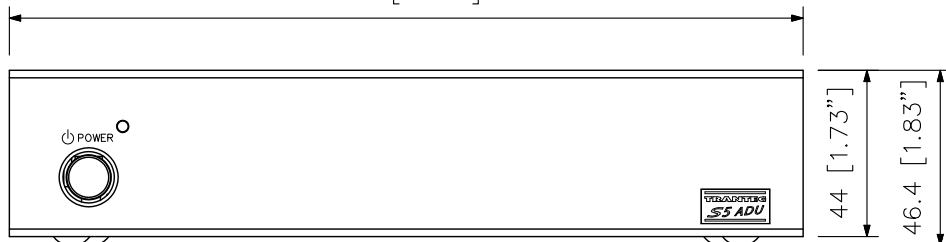

Front View

201.2 [7.92"]

198.1 [7.8"]

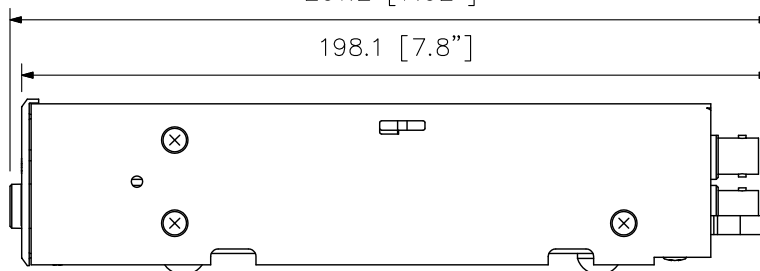

Side View

UNIT:mm SCALE:1/2