


## DESCRIPTION

The S5.3-BTX is a wireless transmitter. This features user-friendly operability, and employ an easy-to-read LCD display. Also, it is possible to perform the system settings through infrared communications.

## SPECIFICATIONS

Version	D2	G2
Modulation	Frequency modulation	
Frequency Range	854 - 865 MHz, UHF	606 - 622 MHz, UHF
RF Carrier Power	50 mW or less	
Modulation System	PLL synthesized	
Channel Selectable	9 banks, 12 frequencies max/bank	
Maximum Input Level	120 dB SPL (microphone sensitivity: Gain "0")	
Audio Input Connector	TA-4 (Mini-XLR 4pins)	
Maximum Deviation	±40 kHz	
Audio Frequency Response	60 Hz - 20 kHz	
Dynamic Range	110 dB or more (with S5.3-RX)	
Tone Frequency	32.768 kHz	
Battery	LR6 (AA)	
Battery Life	10 hours (alkaline)	
Indicator	LCD display, Power lamp	
Antenna	1/4 λ mono-pole type	
Function	Infra-Red link port, Battery life indicator (4 steps), Microphone sensitivity adjustment (Gain 0-9; 20 dB)	
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)	
Finish	Silver	
Dimensions	55 (W) x 80 (H) x 22 (D) mm (2.17" x 3.15" x 0.87")	
Weight	140 g (0.31 lb) (with battery)	
Accessory	Belt clip ...1	

## APPEARANCE

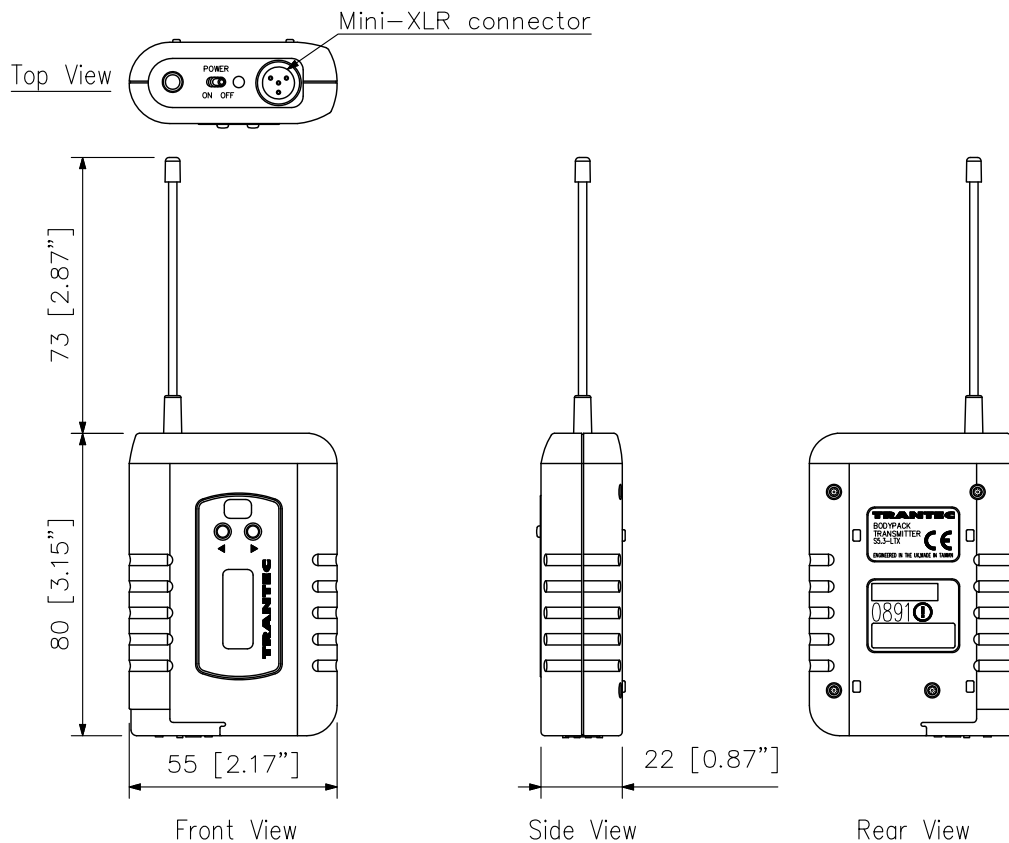

UNIT: mm SCALE: 1/2