


DESCRIPTION

The S5.5-BTX is a wireless transmitter. This features user-friendly operability, and employ an easy-to-read LCD display. Also, it is possible to perform the system settings through infrared communications.

SPECIFICATIONS

Version	C1	D3	G1
Modulation	Frequency modulation		
Frequency Range	794 - 830 MHz, UHF	830 - 865 MHz, UHF	606 - 638 MHz, UHF
RF Carrier Power	50 mW or less		
Modulation System	PLL synthesized		
Channel Selectable	10 banks, 24 frequencies max/bank		
Maximum Input Level	120 dB SPL (microphone sensitivity: Gain "0")		
Audio Input Connector	TA-4 (Mini-XLR 4pins)		
Maximum Deviation	±40 kHz		
Audio Frequency Response	60 Hz - 20 kHz		
Dynamic Range	110 dB or more (with S5.5-RX)		
Tone Frequency	32.768 kHz		
Battery	LR6 (AA)		
Battery Life	10 hours (alkaline)		
Indicator	LCD display, Power lamp		
Antenna	1/4 λ mono-pole type		
Function	Infra-Red link port, Battery life indicator (4 steps), Microphone sensitivity adjustment (Gain 0-9; 20 dB)		
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)		
Finish	Silver		
Dimensions	55 (W) × 80 (H) × 22 (D) mm (2.17" × 3.15" × 0.87")		
Weight	140 g (0.31 lb) (with battery)		
Accessory	Belt crip ...1		

APPEARANCE

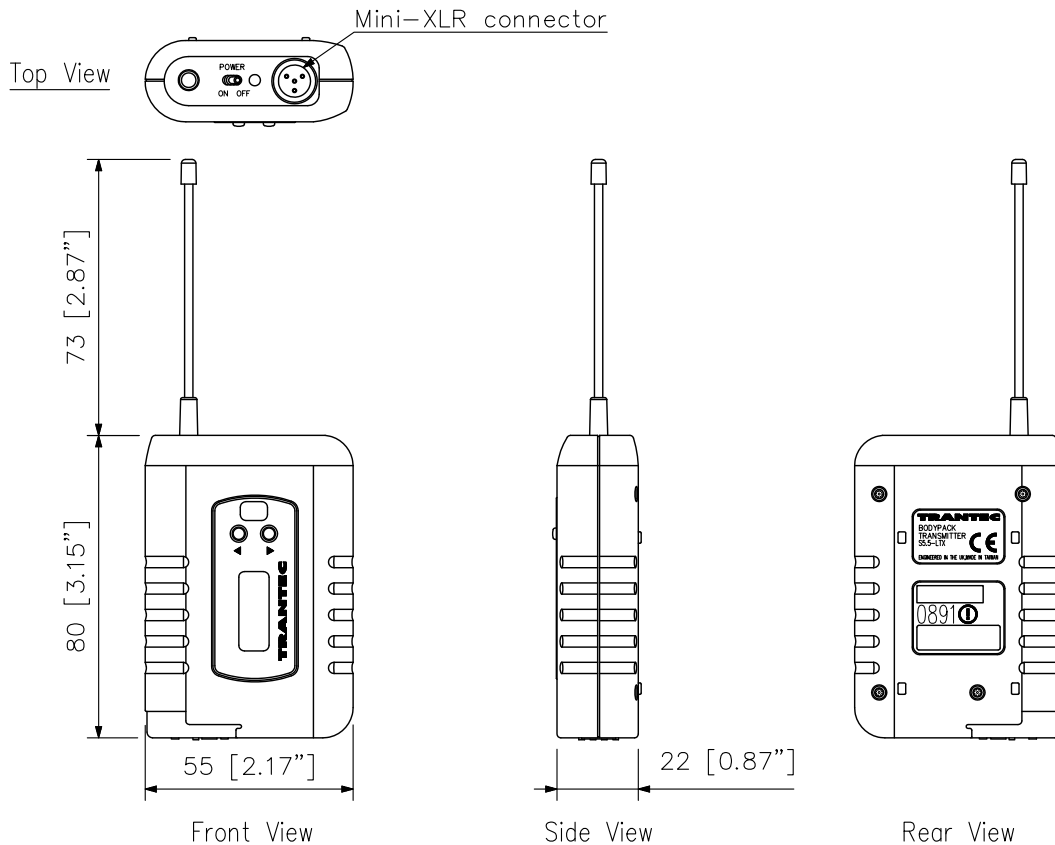

UNIT:mm SCALE:1/2