


DESCRIPTION

The S5.5-HDX is a handheld wireless microphone. This features user-friendly operability, and employ an easy-to-read LCD display. Also, it is possible to perform the system settings through infrared communications.

SPECIFICATIONS

Version	C1	D3	G1
Microphone Element	Dynamic microphone unit: Hyper cardioid		
Modulation	Frequency modulation		
Frequency Range	794 - 830 MHz, UHF	830 - 865 MHz, UHF	606 - 638 MHz, UHF
RF Carrier Power	50 mW or less		
Modulation System	PLL synthesized		
Channel Selectable	10 banks, 24 frequencies max/bank (the number of channels may differ from country to country)		
Maximum Input Level	146 dB SPL (microphone sensitivity: Gain "0")		
Maximum Deviation	±40 kHz		
Audio Frequency Response	60 Hz - 20 kHz		
Dynamic Range	110 dB or more (with S5.5-RX)		
Tone Frequency	32.768 kHz		
Battery	LR6 (AA)		
Battery Life	10 hours (alkaline)		
Indicator	LCD display, Power lamp		
Antenna	Built-in type		
Function	Mute switch, Infra-Red link port, Battery life indicator (4 steps), Microphone sensitivity adjustment (Gain 0-2; 12 dB)		
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)		
Finish	Dark gray		
Dimensions	ø50 × 247.9 mm (ø1.97" × 9.76")		
Weight	380 g (0.84 lb) (with battery)		
Accessory	Microphone holder W3/8" (with stand adapter) ...1, Color ring (6 colors) ...6		

APPEARANCE

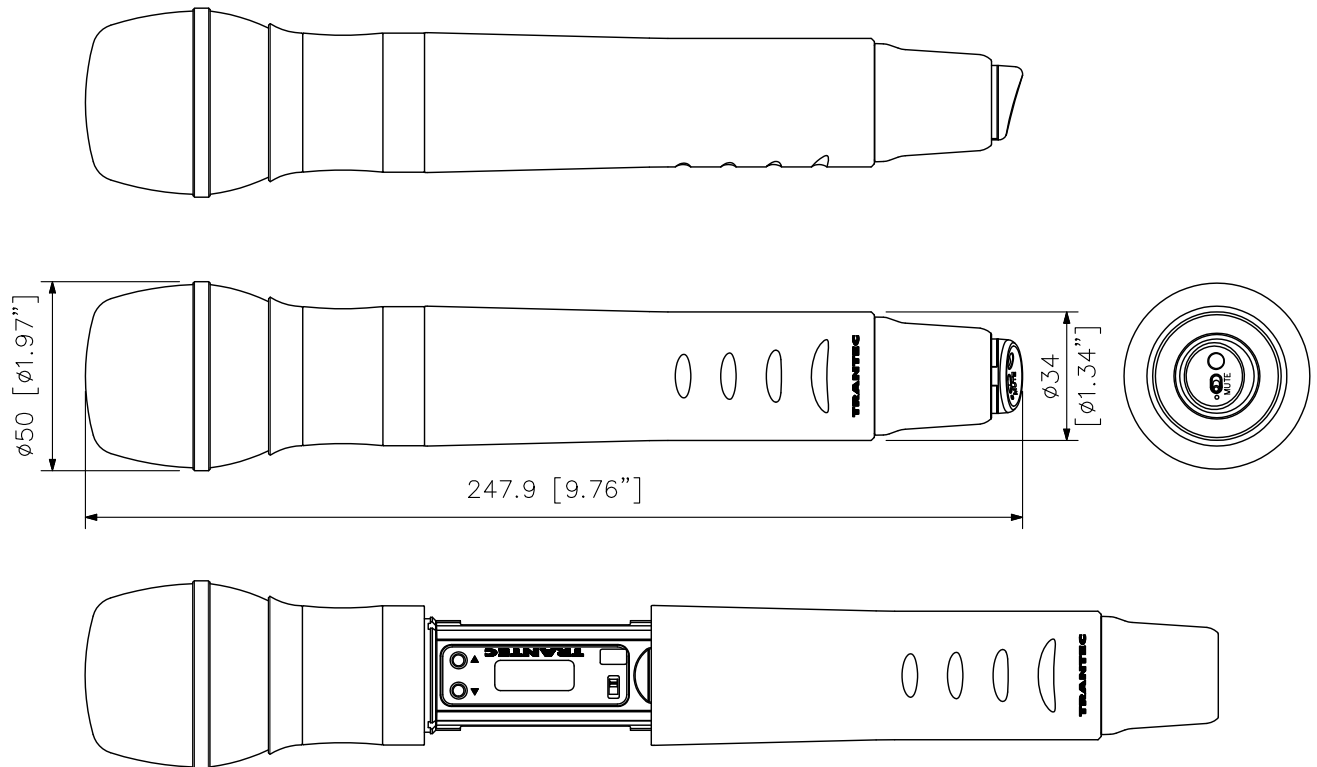

UNIT:mm SCALE:1/2