

DESCRIPTION

The TOA GS-382S is wide range and high quality 2-way speaker system applicable for permanent installation.

SPECIFICATIONS


Input Capacity	High : 30 W continuous pink noise (800 Hz ~ 20,000 Hz, 24-hour) Low : 500 W continuous pink noise (60 Hz ~ 600 Hz, AES standard)
Rated Input	8 Ω
Sound Pressure Level	High : 109 dB 1 m, 1 W Low : 99 dB 1 m, 1 W
Frequency Response	40 Hz ~ 20,000 Hz
Recommended Crossover Frequency	800 Hz
Dimension(WXHXD)	510(20.08") × 1060(41.73") × 452(17.80") mm
Weight	48 kg (10.58 lb.)

SPEAKER SYSTEM CONSTRUCTION

Low Frequency Enclosure	Woofer Unit	90° × 40° CD Horn	Compression Driver	Horn Bracket
SB-38S	HLS38UL-8 (38 cm)	LE-M94	HFD-220-8	HY-M94

※ For passive operation, an optional dividing network HNW-800 is required.

APPEARANCE

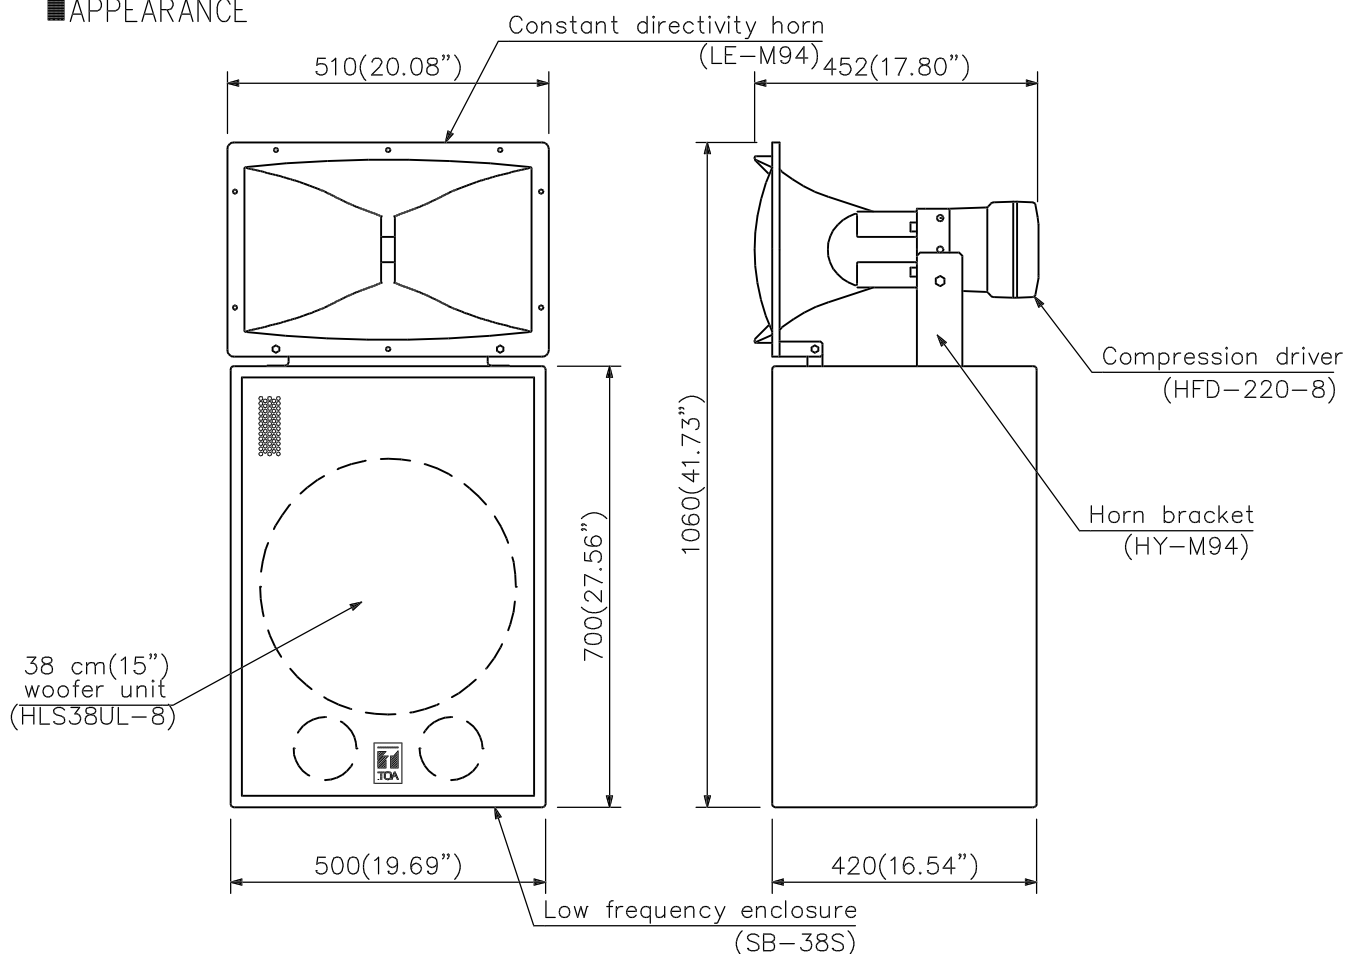

UNIT:mm SCALE:1/12