

DESCRIPTION


The M-243 is an EIA Standard equipment rack (1-unit size) stereo mixer that comes with two monaural inputs, four stereo inputs, one stereo output and two monaural outputs.

SPECIFICATIONS

* 0 dB = 0.775 V

Power Source	120 V AC, 50/60 Hz
Power Consumption	10 W
Monaural Input	Line: -10 dB*, 10 kΩ, unbalanced, ø6.3 mm phone jack (2P) Mic: -60 dB*, 1 kΩ, balanced, XLR3-pin connector Mic (Pad): -40 dB*, 1 kΩ, balanced, XLR3-pin connector
Stereo Input (L, R)	-10 dB*, 10 kΩ, unbalanced, RCA jack
Auxiliary Monaural Input	+4 dB*, 50 kΩ, unbalanced, ø6.3 mm phone jack (2P)
Auxiliary Stereo Input	+4 dB*, 50 kΩ, unbalanced, ø6.3 mm phone jack (2P)
Stereo Output (L, R)	+4 dB*, 1 kΩ, unbalanced, ø6.3 mm phone jack (2P)
Monaural Output (1, 2)	+4 dB*, 1 kΩ, unbalanced, ø6.3 mm phone jack (2P)
REC Output (L, R)	-10 dB*, 1 kΩ, unbalanced, RCA jack
Frequency Response	20 Hz - 20 kHz (+1, -2 dB)
T.H.D.	0.01 % or less (1 kHz, rated input/output)
Noise Level (IHF-A)	When all volume controls are in minimum position. Stereo Output (L, R): -105 dB* or less Monaural Output (1, 2): -98 dB* or less When the stereo, monaural (1, 2) are in maximum position. Stereo Output (L, R): -94 dB* or less Monaural Output (1, 2): -95 dB* or less
Finish	Front Panel: Alumite, black Case: Steel, black
Dimensions	483 (W) × 46 (H) × 301.8 (D) mm (19.02" × 1.81" × 11.88")
Weight	3.8 kg (8.38 lb)
Accessory	Rack mounting screw...4, Rubber foot...4, Knob (blue, small)...2, Knob (red, small)...2, Knob (blue, large)...1, Knob (red, large)...1, Power cord (2 m (6.56 ft))...1

APPEARANCE

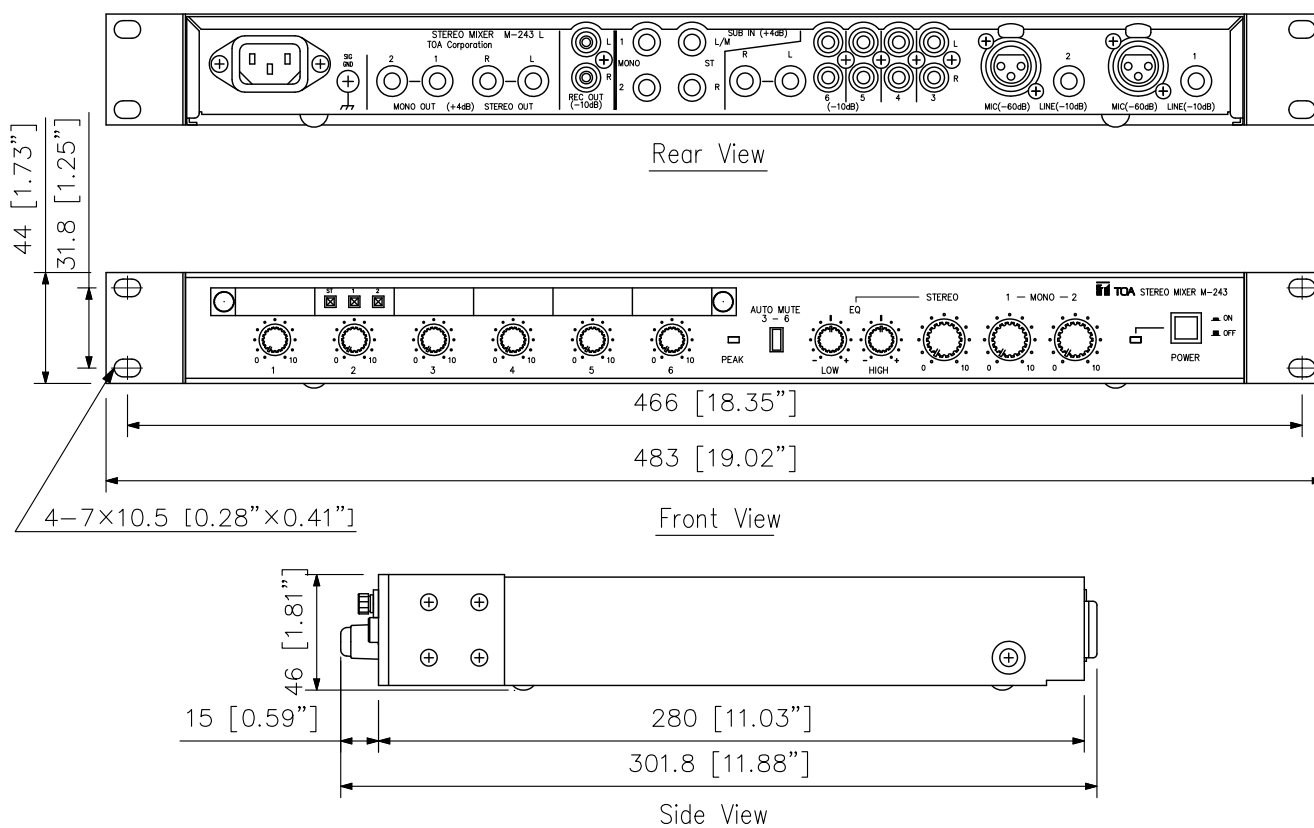

UNIT:mm SCALE:1/3