


SPECIFICATIONS

Standard frequencies	40.68MHz, 42.89MHz, 44.87MHz, 47.27MHz, 39.00MHz, 48.40MHz
Receiving system	Space diversity
Receiving circuit	Crystal oscilation superheterodyne
Antenna input	75 ohms × 2
Receiving sensitivity	5dB μ v
Frequency response	50 ~ 15,000Hz
Rated output	600 ohms Balanced, 1V
Distortion factor	10%

APPEARANCE

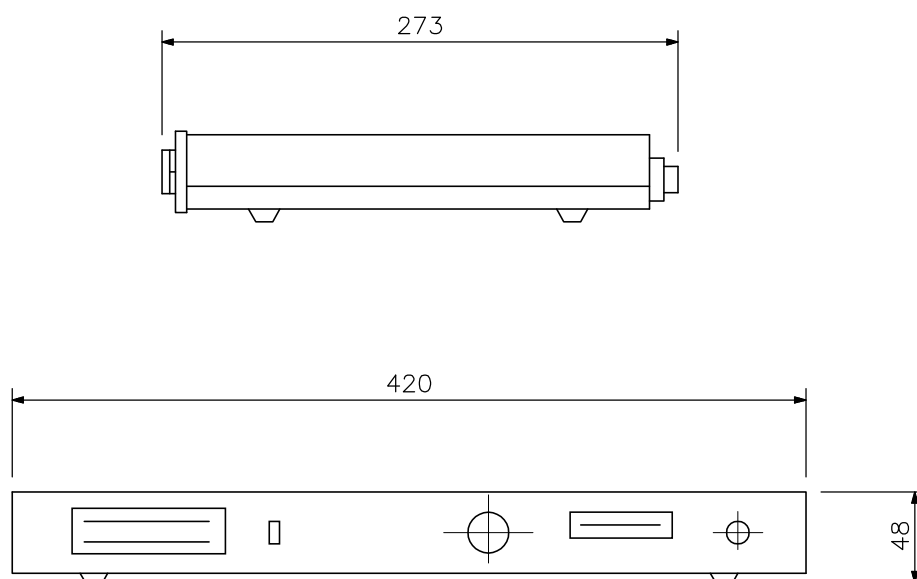

UNIT:mm SCALE:1/4