

DESCRIPTION

The PA-3640VB H2 power amplifier can be used for rack-mount application.


SPECIFICATIONS

* 0 dB = 1 V


Power Source	220 V AC, 50 Hz or 24 V DC
Power Consumption	1100 VA (at rated output)
Output Power	360 W
Input	2 Program inputs (parallel), 0 dB*, 100 kΩ, balanced 2 Priority inputs (parallel), 0 dB*, 100 kΩ, balanced
Output and Load Impedance	100 V/27.8 Ω, 50 V/6.9 Ω
S/N Ratio	80 dB or more
Distortion	2% or less (at rated output $f = 1$ kHz)
Frequency Response	40 - 16,000 Hz ± 3 dB (at 1/3 rated output)
Finish	Panel: Surface-treated steel plate, black, 30% gloss, paint
Dimensions	483 (W) X 177 (H) X 332 (D) mm (19.02" X 6.97" X 13.07")
Weight	27.8 kg (61.29 lb)
Accessory	Rack mounting screw (with washer) ---4, Fuse (5 A) ---1, Fuse (30 A) ---2

APPEARANCE


Rear View

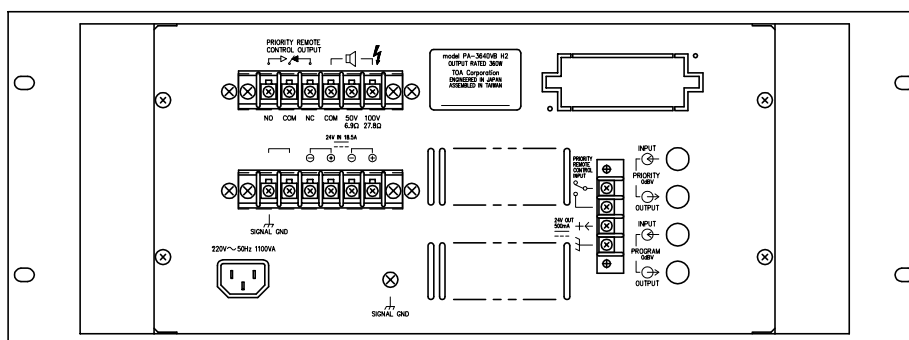

Front View

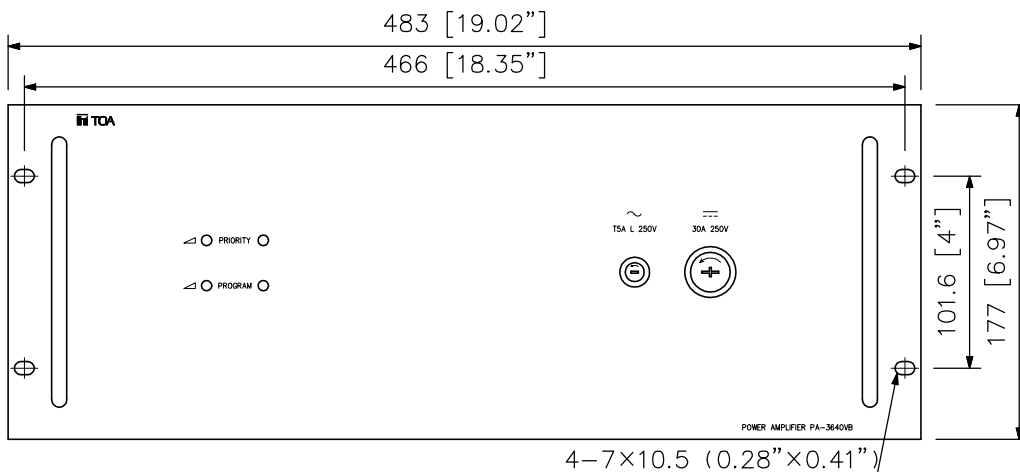

Side View

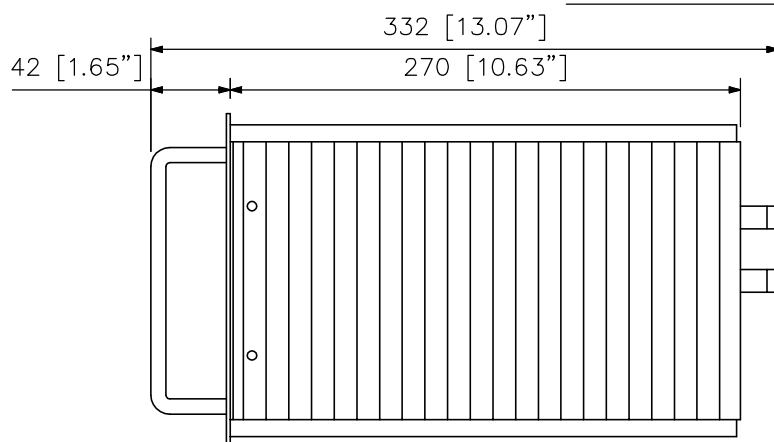

UNIT:mm SCALE:1/4