






DESCRIPTION

The PC-119 speaker is designed to be exclusively used with the voice evacuation system, and features high efficiency and superb heat-resistant capabilities.

SPECIFICATIONS

Rated Input	1 W
Rated Impedance	10 kΩ
Sensitivity	100 dB (1 W, 1 m)
Frequency Response	500 – 4,000 Hz
Heat-resistance Capability	With stand 300°C air current for 10 min.
Water Resistance	JIS C 5504 standard
Dielectric Strength	1,000 V AC, 1 minute (Between speaker cable and body)
Insulation Resistance	500 V DC, more than 10 MΩ (Between speaker cable and body)
Fixing Hole	ø210 (diameter) × 30 (maximum ceiling panel thickness) mm
Speaker Cable Length	30 cm
Finish	Body: Incombustible used (Aluminum and iron) Front grille mounting frame: Off-white, paint Punched net: Aluminum, silver (true material color)
Dimensions	ø245 × 100 (D) mm
Weight	1.5 kg
Accessory	Frame mounting clip.....2, Ceiling mounting screw.....1set

APPEARANCE

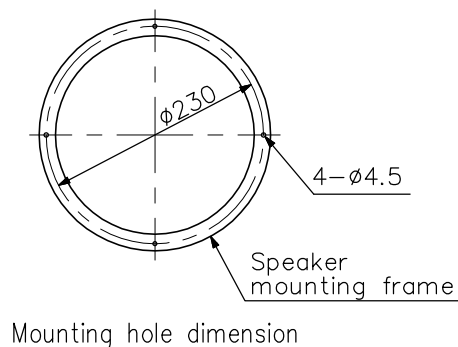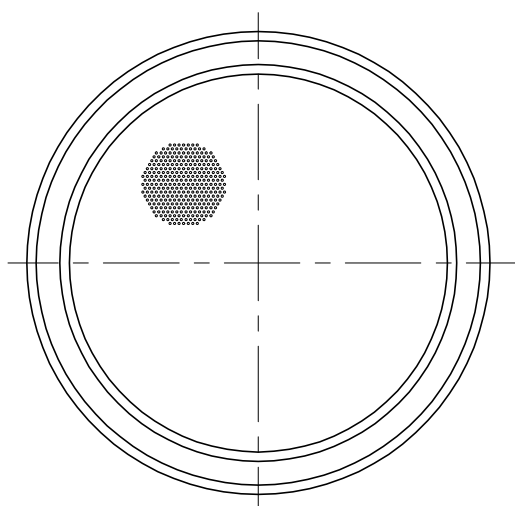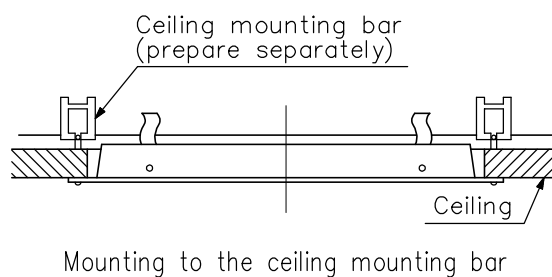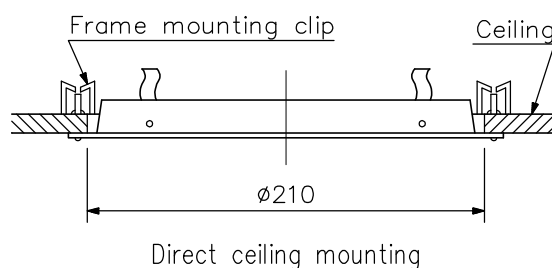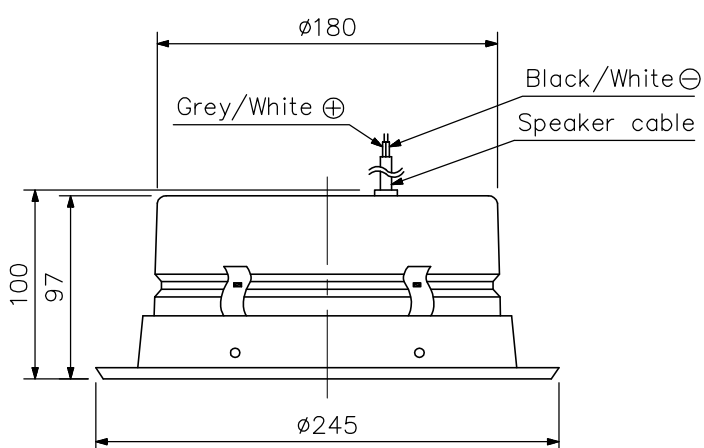

UNIT:mm SCALE:1/4