

INSTRUCTION MANUAL

JUNCTION PANEL

JP-1216

Thank you for purchasing TOA's Junction Panel.

Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.

1. GENERAL DESCRIPTION


The JP-1216 is a junction panel for connection of rack mounted equipment to external equipment. Connect rack mounted equipment to the rear-mounted terminals, and external equipment cables to the front-mounted terminals after removing the front panel.

2. INSTALLATION PRECAUTIONS

- Be sure to mount the unit in a component rack when using the unit. (2-unit size)
- Do not connect other equipment other than sound equipment.
- Do not use the LINE terminals located on both front and rear chassis for other than signal lines.
 The terminals are interconnected with a 2-core shielded cable.

3. APPEARANCE

Unit: mm (in)

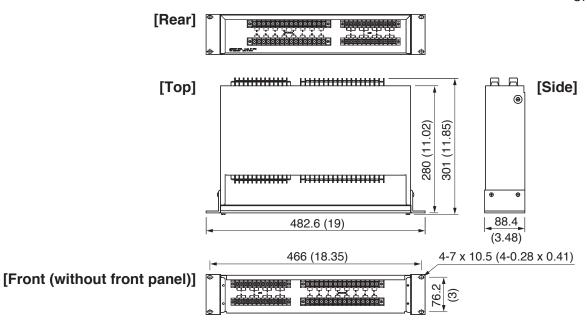

4. SPECIFICATIONS

Line Terminals	8 lines (for signal lines only)
Speaker Terminals	16 lines, 100 V 15 A
Finish	Front panel: black
Dimensions	482.6 (w) x 88.4 (h) x 301 (d) mm (19" x 3.48" x 11.85")
Weight	3.7 kg (8.16 lb)

Note: The design and specifications are subject to change without notice for improvement.

· Accessories

Rack mounting screw 4

URL: https://www.toa.jp/