


DESCRIPTION

The DS-660 is designed for exclusive use with the EXES-6000 series intercom systems.


SPECIFICATIONS

Power Requirements	AC mains, 50/60 Hz
DC Rated Output	+5 V : 3 A, +12 V : 2 A, +18 V : 4 A, +24 V : 4 A +5 V/+12 V : DC/DC converter method +18 V : Series control method
Protection Circuit	Internal overcurrent and overvoltage protection circuit for +5 V, +12 V
Charging Circuit	Internal constant current charging circuit for the sealed type NDC-2435 Ni-cd battery specified by TOA
Ambient Temperature	0 °C to +40 °C
Weight	18 kg (39.68 lb.)


APPEARANCE

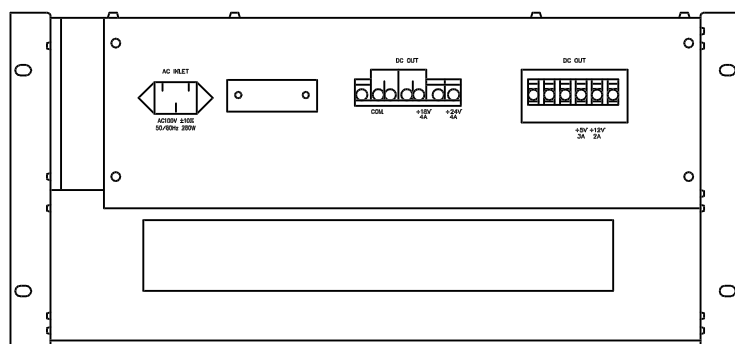


Rear View

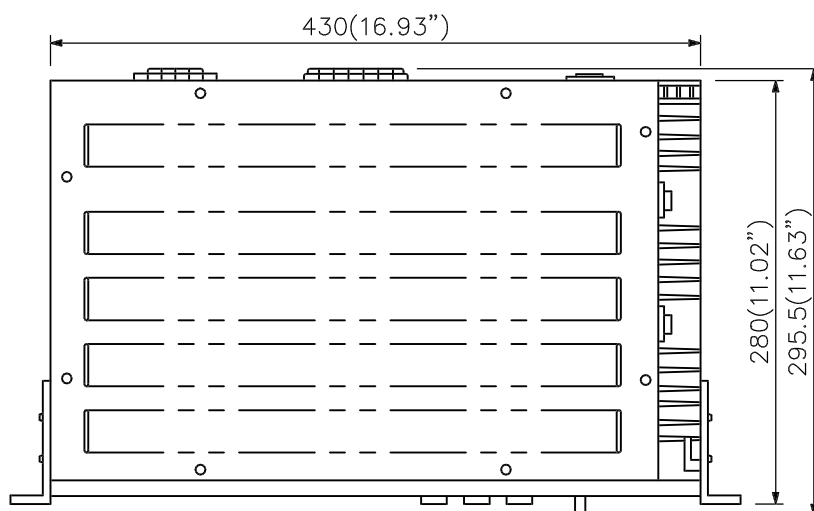

Top View

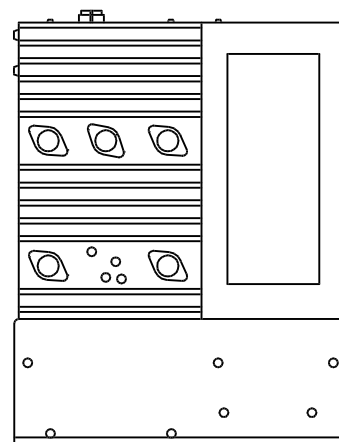

Side View

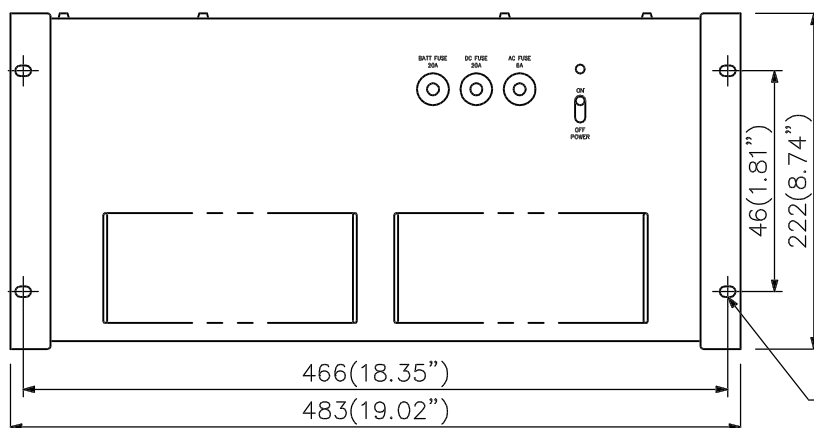

Front View

4-7×10.5
(4-0.28"×0.41")

UNIT:mm SCALE:1/5

※This product is sold only in Japan.