



OPERATING INSTRUCTIONS


PA AMPLIFIERS

A-2030 CE-AU

A-2060 CE-AU

A-2120 CE-AU

A-2240 CE-AU

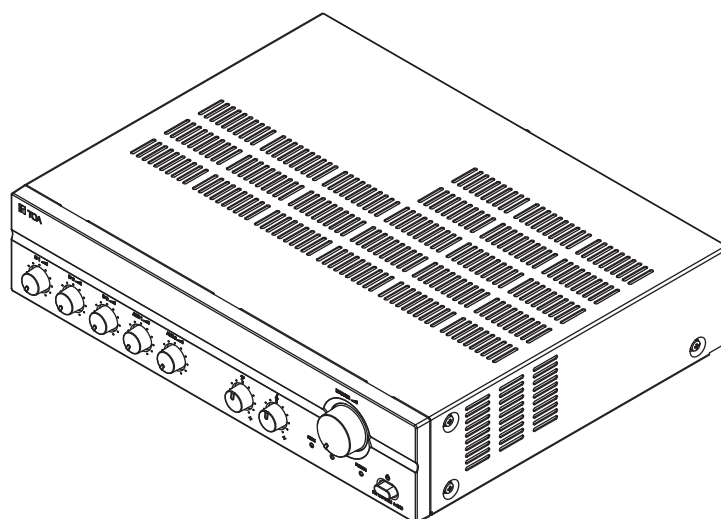

This figure represents the A-2120.

Thank you for purchasing TOA's PA Amplifiers.

Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.

TABLE OF CONTENTS

1. IMPORTANT SAFETY INSTRUCTIONS	3
2. SAFETY PRECAUTIONS	3
3. GENERAL DESCRIPTION	5
4. FEATURES	5
5. NOMENCLATURE AND FUNCTIONS	5
Front	5
Rear	5
6. CONNECTIONS	7
6.1. Input Connections	7
6.2. Output Connections	8
6.3. Example of External Equipment Connections	8
7. MUTING FUNCTION	9
8. INSTALLATION	9
9. VOLUME CONTROL SETTINGS	9
10. BLOCK & LEVEL DIAGRAM	10
11. DIMENSIONAL DIAGRAM	11
12. SPECIFICATIONS	12

1. IMPORTANT SAFETY INSTRUCTIONS

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacture's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of the polarized or grounding-type plug.
A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety.
If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use attachments/accessories specified by the manufacturer.
- Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus.
When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.



2. SAFETY PRECAUTIONS

- Before installation or use, be sure to carefully read all the instructions in this section for correct and safe operation.
- Be sure to follow all the precautionary instructions in this section, which contain important warnings and/or cautions regarding safety.
- After reading, keep this manual handy for future reference.

Safety Symbol and Message Conventions

Safety symbols and messages described below are used in this manual to prevent bodily injury and property damage which could result from mishandling. Before operating your product, read this manual first and understand the safety symbols and messages so you are thoroughly aware of the potential safety hazards.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operation and maintenance (servicing) instruction in the literature accompanying the appliance.



WARNING

Indicates a potentially hazardous situation which, if mishandled, could result in death or serious personal injury.

When Installing the Unit

- Do not expose the unit to rain or an environment where it may be splashed by water or other liquids, as doing so may result in fire or electric shock.
- Use the unit only with the voltage specified on

the unit. Using a voltage higher than that which is specified may result in fire or electric shock.

- Do not cut, kink, otherwise damage nor modify the power supply cord. In addition, avoid using the power cord in close proximity to heaters, and never place heavy objects -- including the unit itself -- on the power cord, as doing so may result in fire or electric shock.
- Avoid installing or mounting the unit in unstable locations, such as on a rickety table or a slanted surface. Doing so may result in the unit falling down and causing personal injury and/or property damage.

- The terminals marked with symbol ⚡ are hazardous live. The external wiring to these terminals requires installation by an instructed person.
- The apparatus shall be connected to a mains socket outlet with a protective earthing connection.
- The socket-outlet shall be installed near the equipment and the plug shall be easily accessible.

When the Unit is in Use

- Should the following irregularity be found during use, immediately switch off the power, disconnect the power supply plug from the AC outlet and contact your nearest TOA dealer. Make no further attempt to operate the unit in this condition as this may cause fire or electric shock.
 - If you detect smoke or a strange smell coming from the unit
 - If water or any metallic object gets into the unit
 - If the unit falls, or the unit case breaks
 - If the power supply cord is damaged (exposure of the core, disconnection, etc.)
 - If it is malfunctioning (no tone sounds)
- To prevent a fire or electric shock, never open nor remove the unit case as there are high voltage components inside the unit. Refer all servicing to qualified service personnel.
- Do not place cups, bowls, or other containers of liquid or metallic objects on top of the unit. If they accidentally spill into the unit, this may cause a fire or electric shock.


CAUTION

Indicates a potentially hazardous situation which, if mishandled, could result in moderate or minor personal injury, and/or property damage.

When Installing the Unit

- Never plug in nor remove the power supply plug with wet hands, as doing so may cause electric shock.
- When unplugging the power supply cord, be sure to grasp the power supply plug; never pull on the cord itself. Operating the unit with a damaged power supply cord may cause a fire or electric shock.
- Do not block the ventilation slots in the unit's cover. Doing so may cause heat to build up inside the unit and result in fire. Also, periodically clean the ventilation slots of dust.
- Avoid installing the unit in humid or dusty locations, in locations exposed to the direct sunlight, near the heaters, or in locations generating sooty smoke or steam as doing otherwise may result in fire or electric shock.

- To avoid electric shocks, be sure to switch off the unit's power when connecting speakers.
- Be sure to follow the instructions below when rack-mounting the unit. Failure to do so may cause a fire or personal injury.
 - Install the equipment rack on a stable, hard floor. Fix it with anchor bolts or take other arrangements to prevent it from falling down.
 - When connecting the unit's power cord to an AC outlet, use the AC outlet with current capacity allowable to the unit.
 - Rack-mounting screws are not supplied with the unit. Prepare them that are appropriate for the equipment rack.
- Keep the A-2000 series amplifiers over 10 cm away from objects that may obstruct air flow to prevent the unit's internal temperature rise.

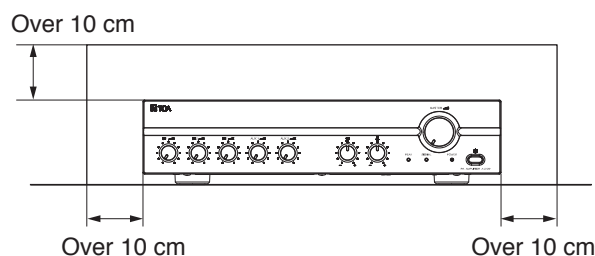

When the Unit is in Use

- Do not operate the unit for an extended period of time with the sound distorting. Doing so may cause the connected speakers to heat, resulting in a fire.
- Switch off the power, and unplug the power supply plug from the AC outlet for safety purposes when cleaning or leaving the unit unused for 10 days or more. Doing otherwise may cause a fire or electric shock.

An all-pole mains switch with a contact separation of at least 3 mm in each pole shall be incorporated in the electrical installation of the building.



The lighting flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

ATTENTION

- L'appareil ne doit pas être exposé aux éclaboussures ou écoulements et tous objets remplis de liquide, tels que vases, ne doivent pas être sur l'appareil.

3. GENERAL DESCRIPTION


TOA's Basic Amplifiers A-2030, A-2060, A-2120, and A-2240 are high cost-performance mixer power amplifiers suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.

4. FEATURES


- High durability, high reliability, and high cost performance.
- Three microphone inputs, two AUX inputs, and one recording output.
- Speaker output of constant voltage distribution system (70 V or 100 V) and low impedance (4 Ω).
- Operates on both AC and DC power.
- Muting function.
- Independent input volume controls and master volume control.
- Independent tone controls of boost and cut type for both high and low frequencies.
- MIC 1, MIC 2, and MIC 3 inputs are equipped with XLR connectors and mute switch control.
- MIC 1 with phantom power for condenser microphones.
- Current limiter circuitry protects transistors, and the thermal protection circuitry prevents a failure due to overheat.
- All MIC inputs are electronically-balanced input.

5. NOMENCLATURE AND FUNCTIONS

[Front]

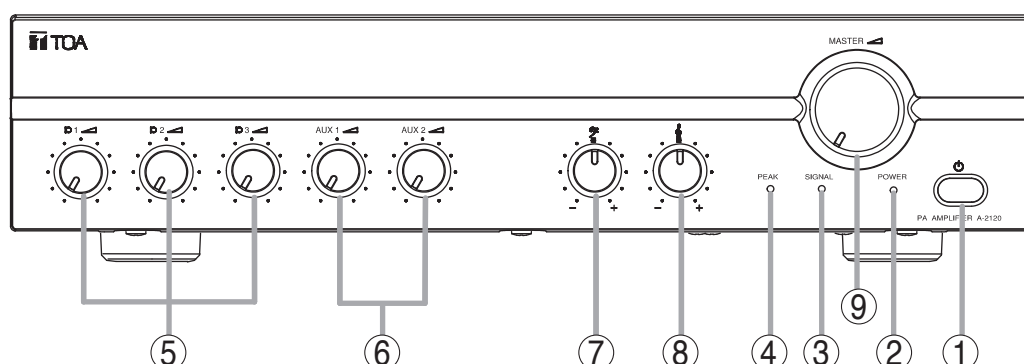

[Rear]

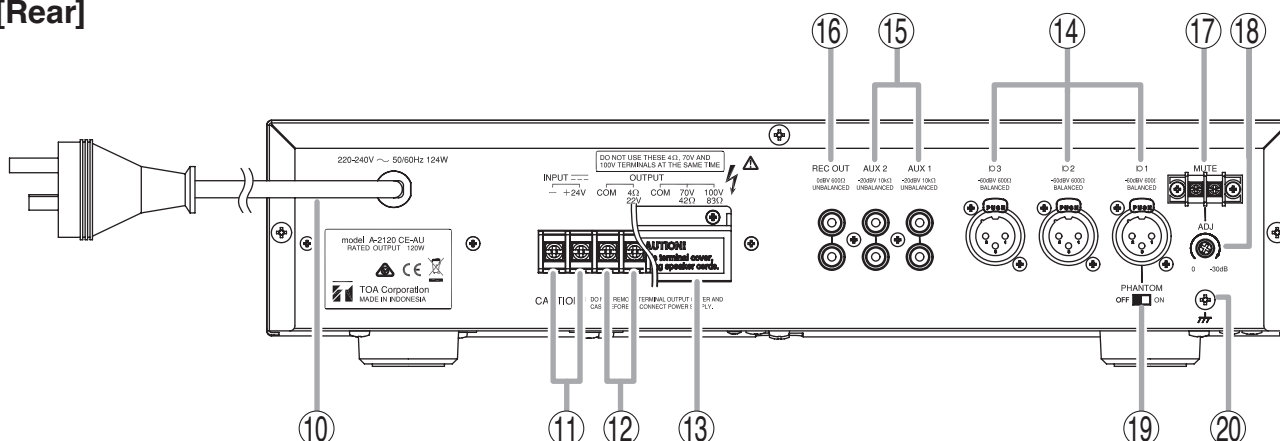

1. Power switch

Press to turn ON the power.
Press again to turn the power STANDBY.
Disconnect the AC mains plug or DC Terminal to shut the power OFF completely.

2. Power indicator

Lights green when power is switched ON.

3. Signal indicator

Lights green when power is switched ON, and indicates an output signal.

4. Peak indicator

Lights red to indicate the output signal reaches the peak level, this indicates that sound is distorted. In such a case, adjust each volume control to reduce output level.

5. Microphone volume control

Adjusts the microphone level.

6. AUX volume control

Adjusts the AUX level.

7. Bass control

Adjusts bass response. Rotate clockwise to increase bass output, and counterclockwise to reduce it. The center position provides flat characteristics.

8. Treble control

Adjusts treble response. Rotate clockwise to increase treble output, and counterclockwise to reduce it. The center position provides flat characteristics.

9. Master volume control

Adjusts the overall signal level.

10. AC power cord

Connects to an AC power source.

11. DC terminal

Connects to a DC power supply of 24 V.

12. Output terminals

Connect to speakers. When connecting speakers use only one of the speaker output terminals, low or high impedance.

13. Terminal cover

To avoid electric shock by high voltage from output terminal, put back the terminal cover after connecting speaker cords.

14. MIC 1, MIC 2, and MIC 3 inputs

• (Mic 1: XLR Female Jack)

–60 dB*, 600 Ω, electronically balanced. Not only a dynamic microphone but also phantom powered microphone can connect with only this MIC 1 input.

Use a 3-pin XLR male plug connector when connecting a phantom powered microphone to

this input.

When it connects Dynamic Microphone, please set phantom switch in OFF by all means.

• (Mic 2 and Mic 3 : XLR Female Jack)

–60 dB*, 600 Ω, electronically balanced.

15. AUX 1 and AUX 2 input terminals

–20 dB*, 10 kΩ, unbalanced. Monaural RCA pin jacks. Accept external equipment output signal.

16. Recording output (REC OUT)

0 dB*, 600 Ω, unbalanced. Outputs all input signals before the master volume control. Connect to a cassette deck, etc when recording the broadcast contents.

17. Mute terminal

When this terminal is shorted, the muting function is operated. The connected wire uses more than AWG 24, and please make the length of line less than 10 m.

18. Muting level control

Adjusts the background music level 0 to 30 dB to be automatically reduced when priority function is operated.

19. Phantom switch

Selecting to ON position supplies power for condenser microphones from Mic 1.

This phantom power is 21 V DC.

Note

Be sure to select OFF position when using the microphone that can not be operated on phantom power. The sound will be distorted.








20. Functional earth terminal

Hum noise may be generated when external equipment is connected to the unit. Connecting this terminal to the functional earth terminal of the external equipment may reduce the hum noise.

Note: This terminal is not for protective earth.

* 0 dB = 1 V

• Explanation of Symbols

Symbol	Explanation
	Front panel: Volume controls: turn it clockwise to increase the volume, turn it counterclockwise to decrease the volume.
	Standby mode of the A-2000 series amplifiers: push the button to set the system into standby mode. During the standby mode you cannot broadcast BGM but all other system functions are still active.
	Warning: Indicates a potentially hazardous situation which, if mishandled, could result in death or serious personal injury.
	Do not touch the parts indicated with this symbol. These can provide a dangerous voltage that can result in death or serious personal injury when touching them.
	Do not trash this device into normal waste. Use the foreseen electric waste collection places.
	This mark is a declaration that this product complies with all applicable EU directive and regulations.
	This symbol will indicate a device's compliance with all applicable ACMA regulatory arrangements (telecommunications, radio communications, EMC and EME) ; and with applicable electrical equipment safety requirements relevant to each state and territory in Australia.


6. CONNECTIONS

6.1. Input Connections


6.1.1. Mic 1 Connection (3-pin XLR Male Plug)

XLR Jack connection, Pin-1: Earth, Pin-2: Hot, Pin-3: Cold

[In the case of Dynamic Microphone]

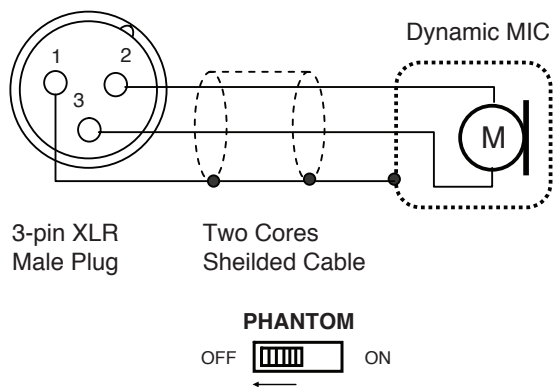


[In the case of Phantom Power Microphone]

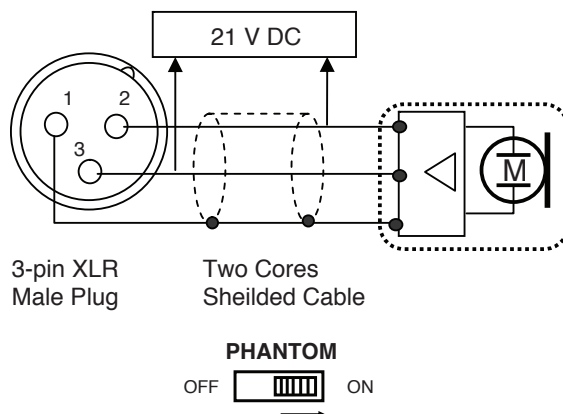


6.1.2. Mic 1 and Mic 2 Connection (3-pin XLR Male Plug)

XLR Jack connection, Pin-1: Earth, Pin-2: Hot, Pin-3: Cold

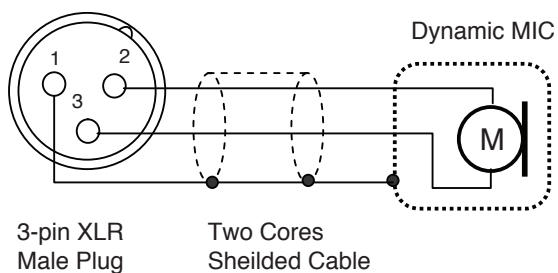


6.1.3. AUX input connections (RCA pin jack)



Signal source (Tuner, Cassette Tape, etc)

6.2. Output Connections

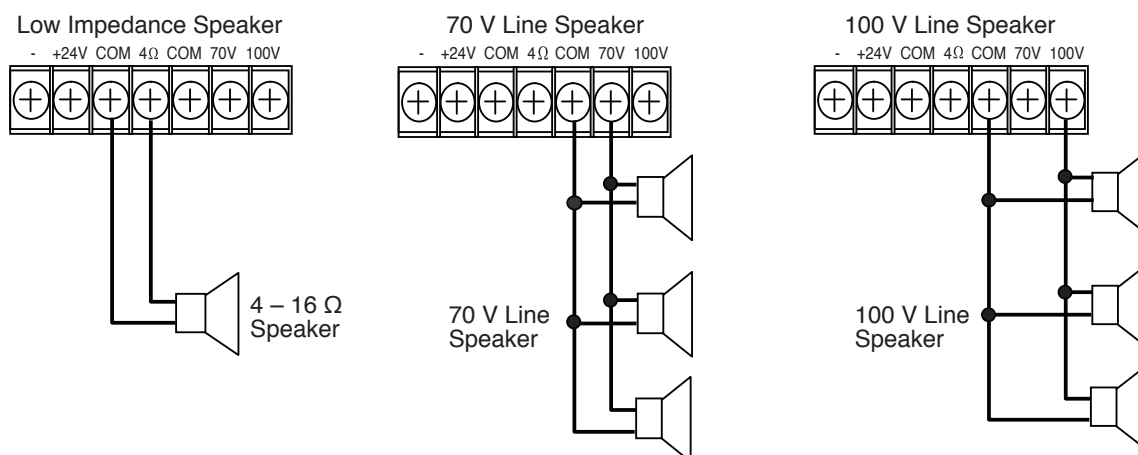

Notes

- Tripartite the 4 Ω, 70 V and 100 V terminals cannot be used at the same time.
- Impedances indicated at the terminal represent the total speaker system (load) impedances.
Total impedance of 100 V line: 330 Ω (A-2030), 170 Ω (A-2060), 83 Ω (A-2120), 42 Ω (A-2240)
Total impedance of 70 V line: 170 Ω (A-2030), 83 Ω (A-2060), 42 Ω (A-2120), 21 Ω (A-2240)




CAUTION

Be sure to attach the supplied terminal cover after connection completion.


Because high voltage is applied to the speaker terminals, never touch these terminals to avoid electric shock.

6.3. Example of External Equipment Connections

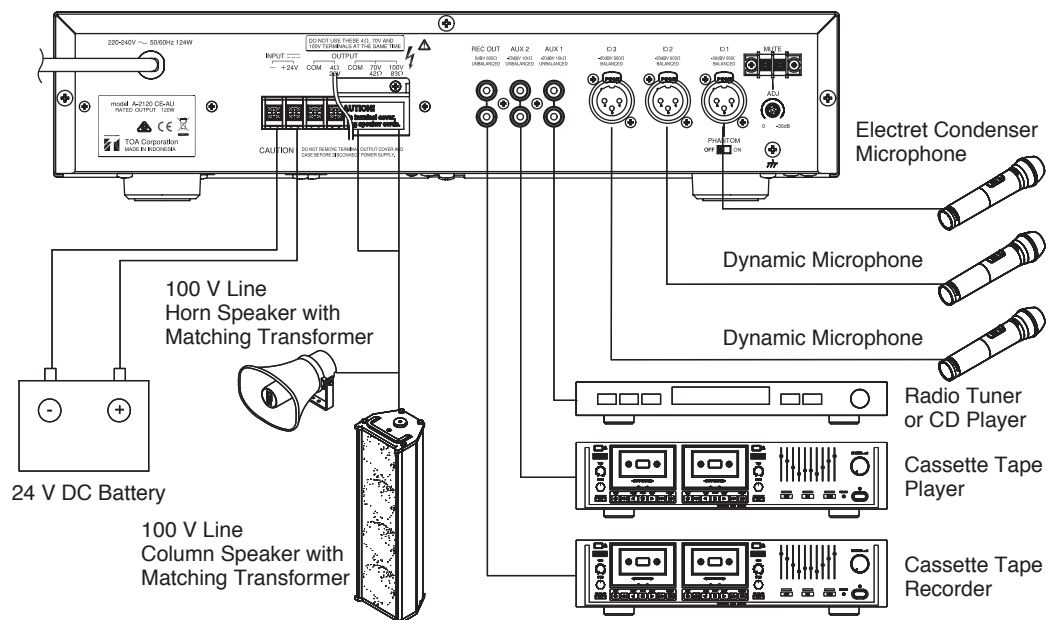

7. MUTING FUNCTION

Connect the supplied connector with lead wires to the muting switch terminal on the rear panel, and Turning ON (shorting) the muting switch allows Mic 1 input to take precedence, muting signals of inputs Mic 2, Mic 3, Aux 1 and Aux 2 by 0 to 30 dB. The attenuation level is preset for -30 dB at the factory.

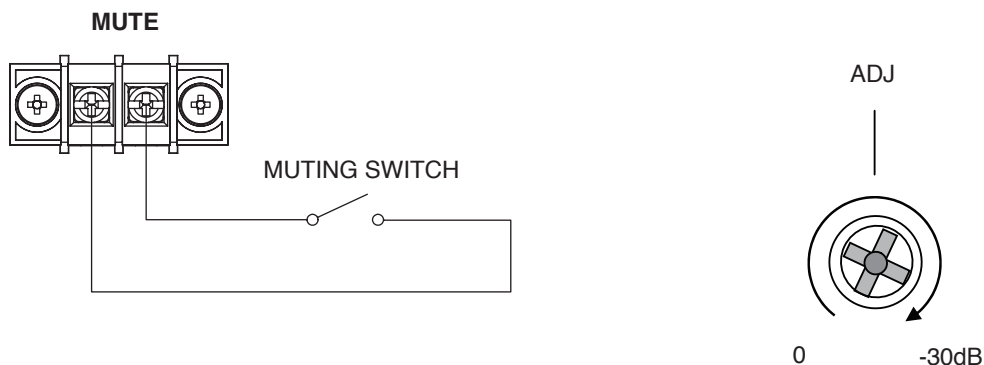


Remark: About Mute Function

When make operates Mute SW, the mute circuit works promptly.

It returns to an old state about 3 seconds later when it does break of Mute SW.

8. INSTALLATION

Keep the unit's all sides over 10 cm (3.94 inches) away from object that may obstruct air flow to prevent the unit's internal temperature rise.


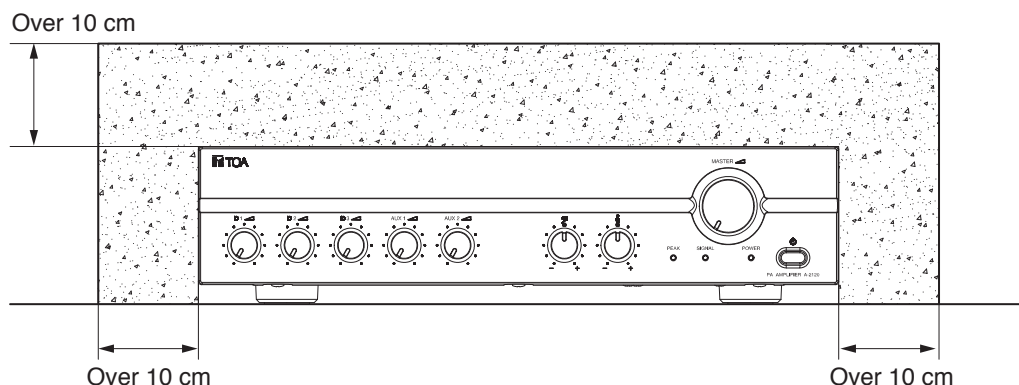


9. VOLUME CONTROL SETTINGS

Output levels are adjustable with individual volume controls. For music play or announcement, adjust the corresponding volume control so that the red peak indicator lights intermittently.

Note that the sound quality is downgraded when the peak indicator remains lit.


10. BLOCK & LEVEL DIAGRAM

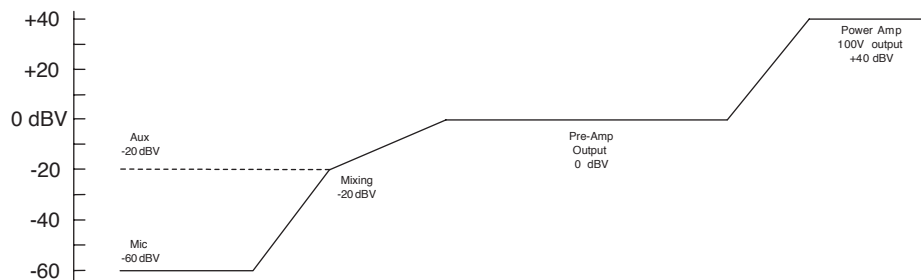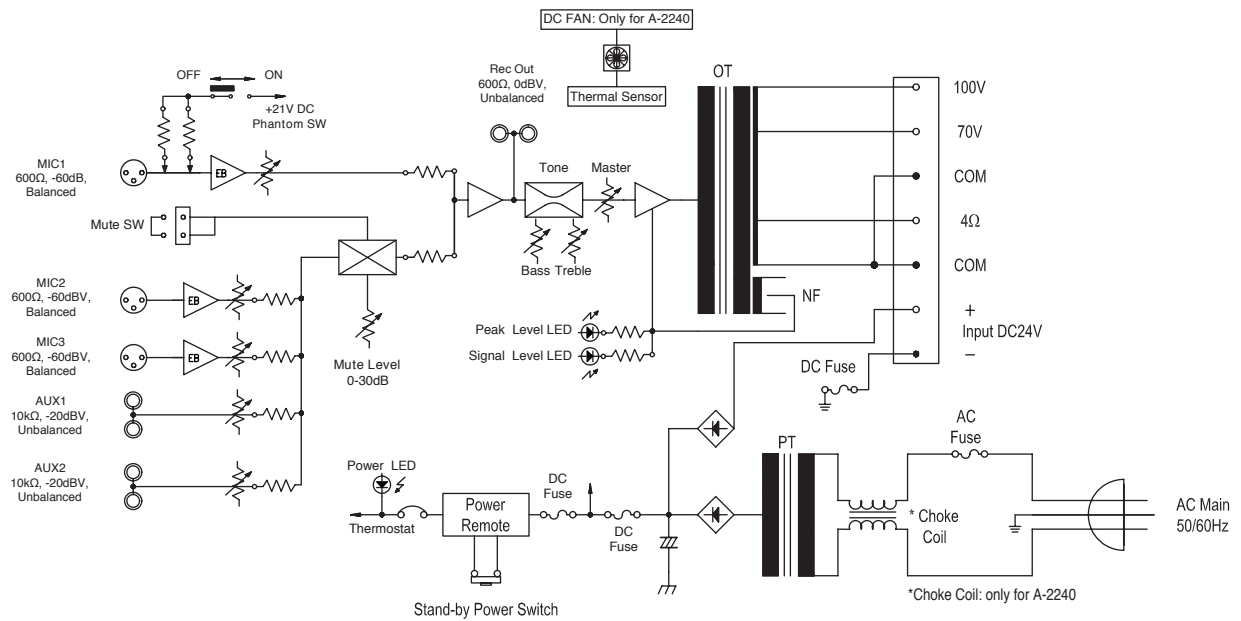


11. DIMENSIONAL DIAGRAM

Unit: mm (inches)

[A-2030 CE-AU, A-2060 CE-AU]

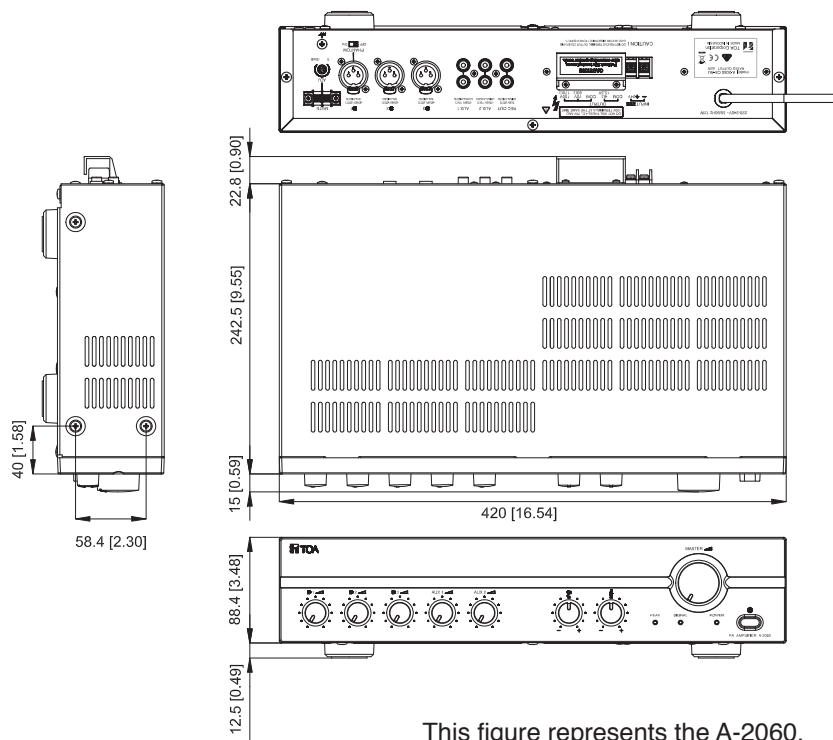

[A-2120 CE-AU, A-2240 CE-AU]

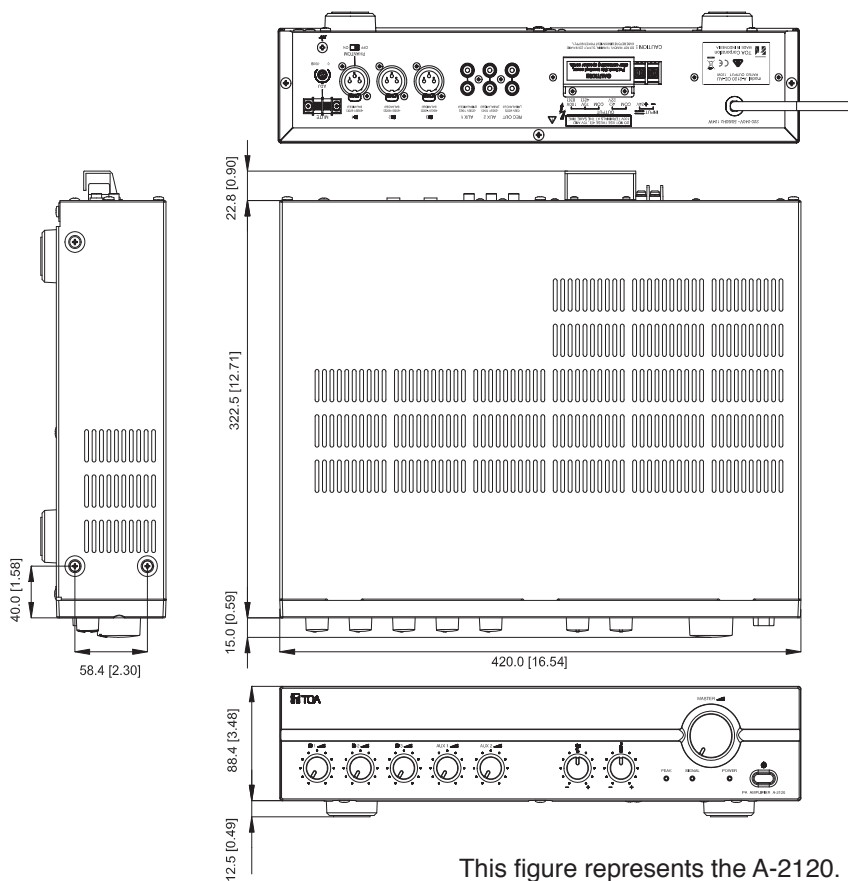

12. SPECIFICATIONS

Model No.		A-2030 CE-AU	A-2060 CE-AU	A-2120 CE-AU	A-2240 CE-AU
Power Source		220 – 240 V AC or 24 V DC			
Rated Output		30 W	60 W	120 W	240 W
Power Consumption (EN60065)		34 W	72 W	124 W	238 W
Power Consumption (DC operation at rated output)		2 A	4 A	8 A	15 A
Frequency Response		50 Hz – 20 kHz (±3 dB)			
Distortion		1% or less at 1 kHz, 1/3 rated power			
Input	MIC 1, 2, 3	–60 dB*, 600 Ω, balanced, equivalent to XLR 3-31 type			
	AUX 1, 2	–20 dB*, 10 kΩ, unbalanced, RCA pin jack			
	Mute	Contact screw terminal (for MIC 1)			
Output	Speaker Out		All speaker outputs are floating balanced.		
	100 V	330 Ω	170 Ω	83 Ω	42 Ω
	70 V	170 Ω	83 Ω	42 Ω	21 Ω
	4 Ω	11 V	15.5 V	22 V	31 V
	Rec out		0 dB*, 600 Ω, unbalanced, RCA pin jack		
Phantom Power		DC +21 V (MIC 1)			
S/N Ratio		60 dB or more			
Tone Control		Bass: ±10 dB at 100 Hz Treble: ±10 dB at 10 kHz			
Muting		MIC 1 overrides other input signals with 0 – 30 dB attenuation by mute terminal contact in MIC 1 DIN type connector.			
Ventilation		–	–	–	Fan cooling
Indicators		Power indicator, Signal indicator, Peak indicator			
Finish		Panel: ABS resin, black Case: Steel plate, black			
Dimensions		420 (w) x 100.9 (h) x 280.3 (d) mm (16.54" x 3.97" x 11.04")		420 (w) x 100.9 (h) x 360.3 (d) mm (16.54" x 3.97" x 14.19")	
Weight		5 kg (11.05 lb)	7 kg (15.43 lb)	10.8 kg (23.81 lb)	13.2 kg (29.1 lb)

* 0 dB = 1 V

Notes

- Specifications are measured on 240 V AC for all models.
- The design and specifications are subject to change without notice for improvement.

Traceability Information for Europe

Manufacturer:
TOA Corporation
7-2-1, Minatojima-Nakamachi, Chuo-ku, Kobe, Hyogo,
Japan

Authorized representative:
TOA Electronics Europe GmbH
Suederstrasse 282, 20537 Hamburg,
Germany

URL: <https://www.toa.jp/>