

DESCRIPTION


The A-2060 is a high cost-performance mixer power amplifier suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.

SPECIFICATIONS

* 0 dB = 1 V

Power Source	120 V AC
Rated Output	60 W
Power Consumption	72 W (EN60065), 150 W (AC operation at rated output)
Frequency Response	50 - 20,000 Hz (± 3 dB)
Distortion	1% or less at 1 kHz, 1/3 rated power
Input	MIC 1, 2: -60 dB*, 600 Ω , balanced, M3.5 screw terminal, distance between barriers: 8.3 mm (0.33") TEL: -10 dB*, 10 k Ω , balanced, M3.5 screw terminal, distance between barriers: 8.3 mm (0.33") AUX 1, 2: -20 dB*, 10 k Ω , unbalanced, RCA pin jack
Output	Speaker out: Balanced (floating), M3.5 screw terminal, distance between barriers: 8.3 mm (0.33") High impedance: 83 Ω (70 V), 10 Ω (25 V) Low impedance: 4 Ω (15.5 V) Rec out: 0 dB*, 600 Ω , unbalanced, RCA pin jack
Phantom Power	DC +21 V (MIC 1)
S/N Ratio	60 dB or more
Tone Control	Bass: ± 10 dB at 100 Hz Treble: ± 10 dB at 10 kHz
Muting	MIC 1, MIC 2, and TEL have a priority function to attenuate AUX1 and AUX 2 input signals by 30 dB. (Sensitivity level for MIC 1, MIC 2, and TEL adjustable) Priority level among MIC 1, MIC 2, and TEL is the same.
Finish	Panel: ABS resin, black Case: Steel plate, black
Dimensions	420 (W) \times 100.9 (H) \times 280.3 (D) mm (16.54" \times 3.97" \times 11.04")
Weight	7.5 kg (16.53 lb)

APPEARANCE

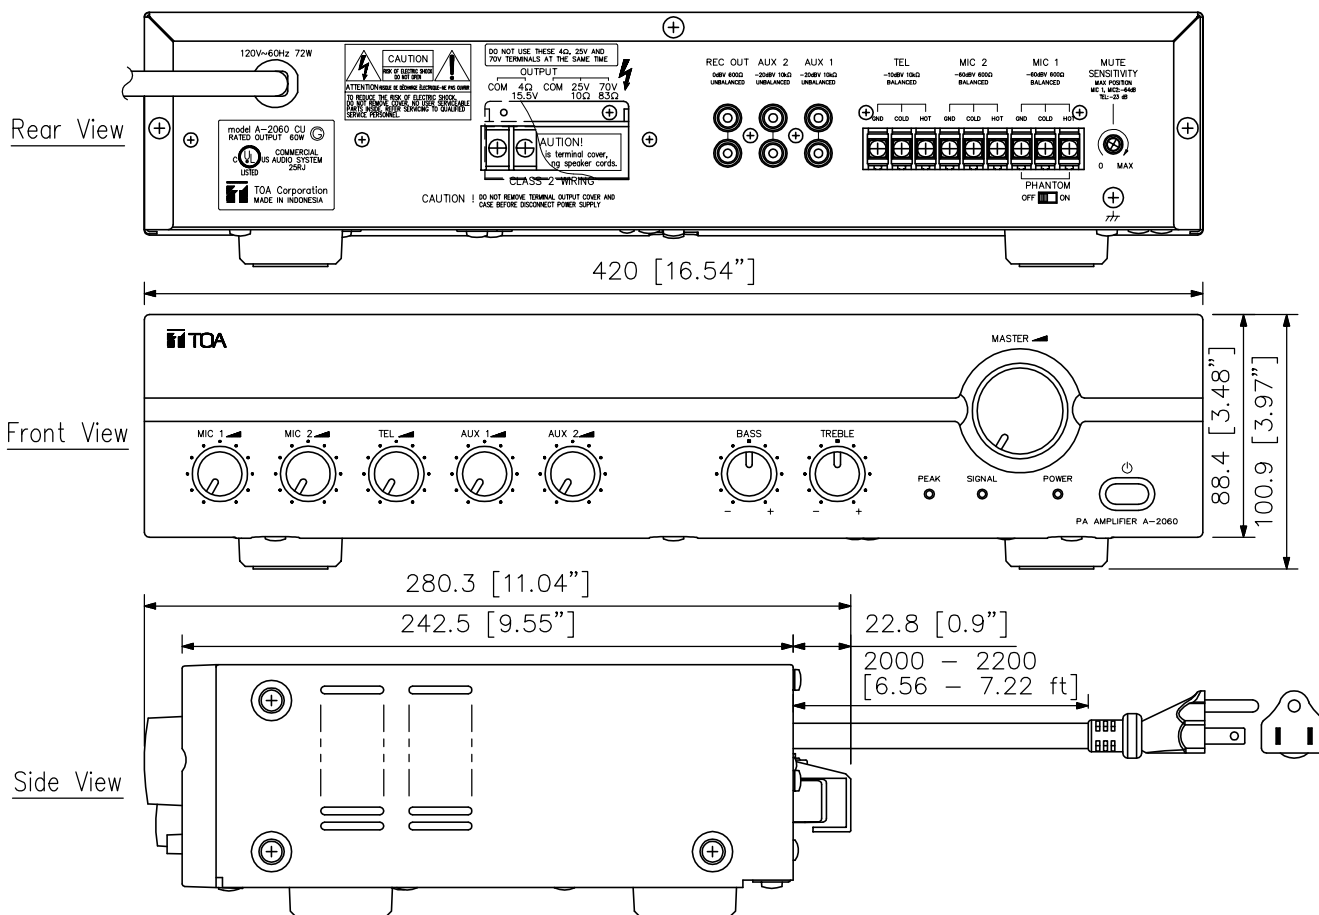

UNIT:mm SCALE:1/3