

DESCRIPTION

The E-232 has two 2/3 octave 14-point equalizers. It can be mounted in an EIA-Standard equipment rack (1-unit size).


SPECIFICATIONS

* 0 dB = 0.775 V

Power Source	220 - 240 V AC, 50/60 Hz
Power Consumption	13 W
Input	+4 dB* 30 k Ω (GAIN: 0 dB), unbalanced, phone-jack and screw terminal
Output	+4 dB* 1 k Ω , unbalanced, phone-jack and screw terminal
Max. Input Level	+32 dB (GAIN: -12 dB)
Max. Output Level	+20 dB
Frequency Response	+1 dB, -2 dB (20 Hz - 20 kHz)
Total Harmonic Distortion	0.01 % or less at 1 kHz (rated output)
Equalization Center Frequency	40 Hz, 63 Hz, 100 Hz, 160 Hz, 250 Hz, 400 Hz, 630 Hz 1 kHz, 1.6 kHz, 2.5 kHz, 4 kHz, 6.3 kHz, 10 kHz, 16 kHz
Control Equalizer Sliders	Boost: +12 dB, +6 dB Cut: -12 dB, -6 dB (switchable)
Gain Range	± 12 dB
Highpass Filter	-12 dB/oct (Adjustable cutoff frequency 15 Hz - 300 Hz)
Hum and Noise (IHF-A)	-98 dB* or less (EQ: ON, HPF: 15 Hz, GAIN: 0 dB, all sliders at 0 position)
Finish	Front panel : Aluminium, black Case: Steel, black
Dimensions	483 (W) $\times$ 46 (H) $\times$ 311 (D) mm (19.02" $\times$ 1.81" $\times$ 12.24")
Weight	3.8 kg (8.38 lb)
Accessory	Security cover $\times$ 1, Security cover fixing screw $\times$ 2, Rack mounting screw $\times$ 4, Rubber foot $\times$ 4, Blind label $\times$ 1, Power cord (2 m (6.56 ft)) $\times$ 1

APPEARANCE


Rear View




Other product version 301H is available depending on the power cord type.

MODEL	301H	313H
AC plug		


Top View

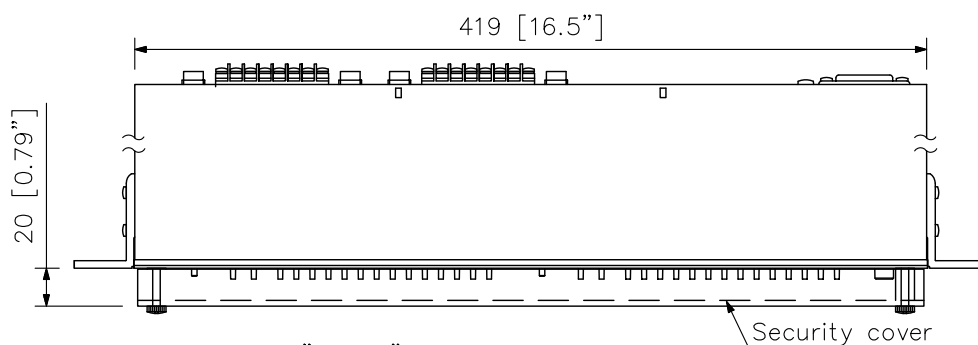

Front View

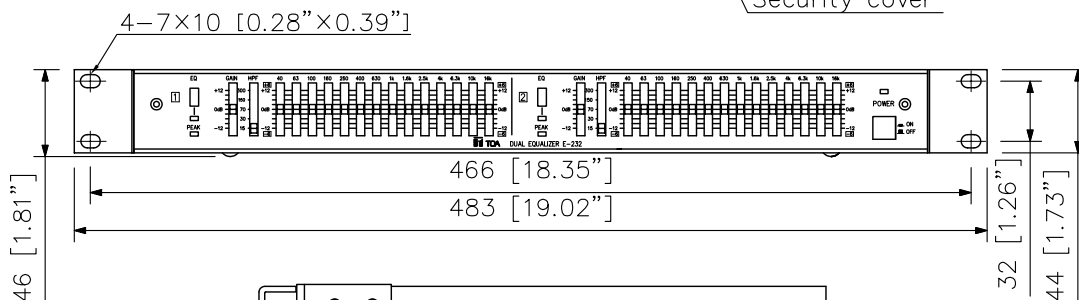

Side View

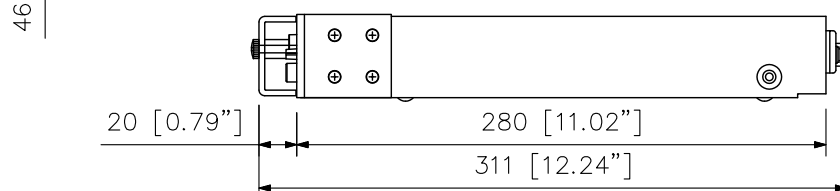

UNIT:mm SCALE:1/4