

DESCRIPTION


Featuring the unique acoustic construction employing a diffuser, the F-121CM ceiling and wall-mounted speaker covers an extremely wide area and can be used for both 70 and 100 V line applications. Well-balanced sound can be heard uniformly at any location.

SPECIFICATIONS

Enclosure	Bass-reflex type
Rated Input	20 W
Rated Impedance	100 V line: 500 Ω (20 W), 1 k Ω (10 W), 2k Ω (5 W), 3.3 k Ω (3 W), 10 k Ω (1 W) 70 V line: 250 Ω (20 W), 500 Ω (10 W), 1 k Ω (5 W), 1.7 k Ω (3W), 5 k Ω (1 W)
Sound Pressure Level	90 dB (1 W, 1 m)
Frequency Response	80 - 18,000 Hz
Speaker Component	Full-range, 12 cm cone-type
Input Connector	Push terminal
Dimensions for Fixing Hole	ϕ 218 (ceiling hole) \times 5 - 35 (mountable board thickness) mm
Finish	Enclosure: Fire-resistant ABS resin, black Punched net: Steel plate, white, paint Frame: Fire-resistant ABS resin, white, paint
Dimensions	ϕ 260 \times 215 (D) mm
Weight	2.8 kg
Accessory	Pattern paper.....1
Option	Electronic controller: AC-120

[Note] The F-121CM must be used with an electronic controller AC-120 (option).

APPEARANCE

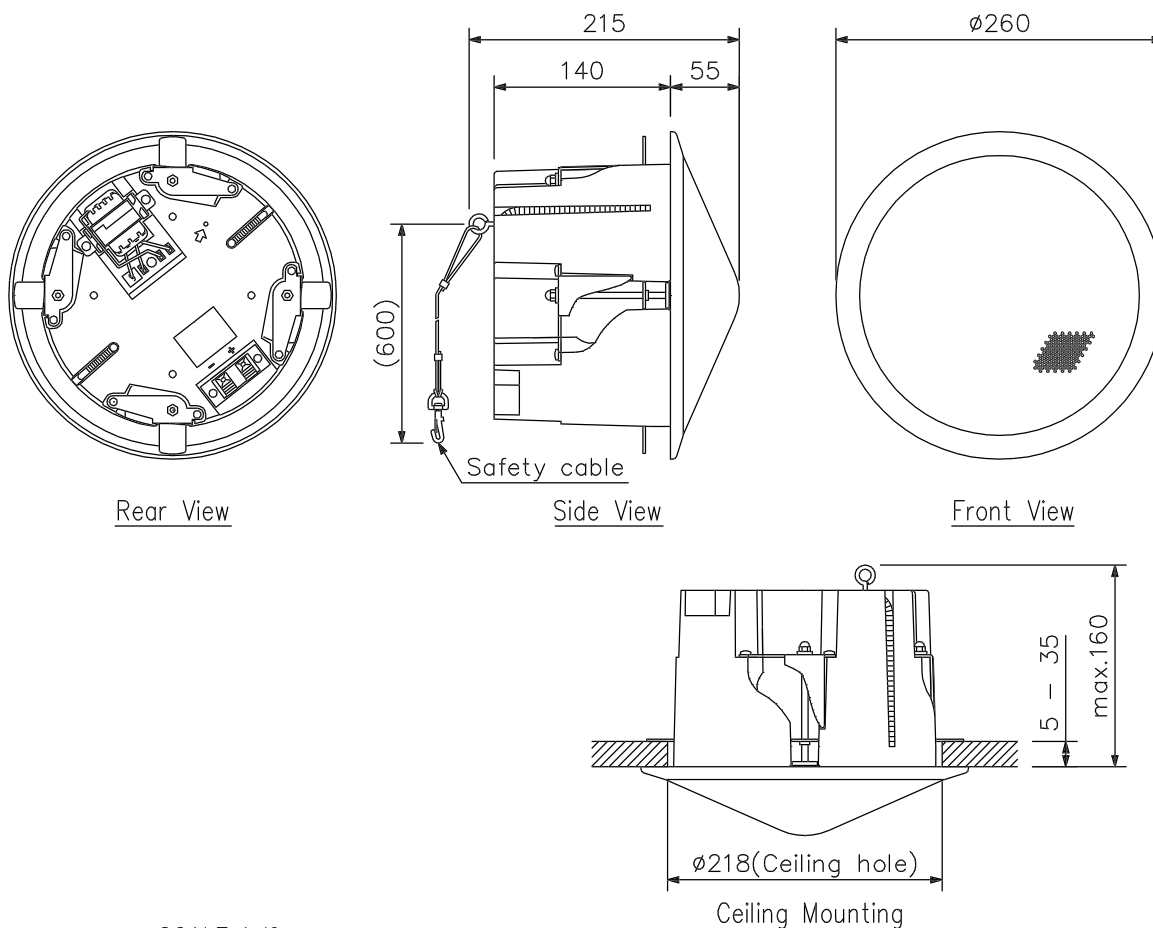

UNIT:mm SCALE: 1/6