

SPEAKER MOUNTING BRACKET

HY-UH04

Thank you for purchasing TOA's Speaker Mounting Bracket.

Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.

1. SAFETY PRECAUTIONS

- Before installation or use, be sure to carefully read all the instructions in this section for correct and safe operation.
- Be sure to follow all the precautionary instructions in this section, which contain important warnings and/or cautions regarding safety.
- After reading, keep this manual handy for future reference.



WARNING

Indicates a potentially hazardous situation which, if mishandled, could result in death or serious personal injury.

- Install the unit only in a location that can structurally support the weight of the unit and the mounting bracket. Doing otherwise may result in the unit falling down and causing personal injury and/or property damage.
- Since the unit is designed for indoor use, do not install it outdoors. If installed outdoors, the aging of parts causes the unit to fall off, resulting in personal injury.
- Do not use other methods than specified to mount the bracket. Extreme force is applied to the unit and the unit could fall off, possibly resulting in personal injuries.
- Owing to the unit's size and weight, be sure that at least two persons are available to install the unit. Failure to do so could result in personal injury.
- Use nuts and bolts that are appropriate for the ceiling's or wall's structure and composition. Failure to do so may cause the unit to fall, resulting in material damage and possible personal injury.
- Tighten each nut and bolt securely. Ensure that the bracket has no loose joints after installation to prevent accidents that could result in personal injury.

- Use the specified mounting bracket in combination. Doing otherwise may cause the unit or component to fall off, resulting in personal injury.

- Do not mount the unit in locations exposed to constant vibration. The mounting bracket can be damaged by excessive vibration, potentially causing the unit to fall, which could result in personal injury.



CAUTION

Indicates a potentially hazardous situation which, if mishandled, could result in moderate or minor personal injury, and/or property damage.

- Avoid touching the unit's sharp metal edge to prevent injury.
- Do not stand or sit on, nor hang down from the unit as this may cause it to fall down or drop, resulting in personal injury and/or property damage.
- Have the unit checked periodically by the shop from where it was purchased. Failure to do so may result in corrosion or damage to the unit or its mounting bracket that could cause the unit to fall, possibly causing personal injury.

2. GENERAL DESCRIPTION


The TOA HY-UH04 is the dedicated mounting bracket for the SR-F04 Speaker system. It allows the SR-F04 to be mounted in a horizontal orientation.

It can be used in conjunction with one of the optional speaker mounting brackets shown below depending on the installation location.

Installation location	Model name	Model No.
Pipe	Speaker mounting bracket	HY-B0801
Ceiling	Ceiling mount bracket	HY-C0801
Wall	Wall mount bracket	HY-W0801

The SR-F04 can be installed directly to the ceiling or the wall only with this bracket.

3. DIMENSIONAL DIAGRAM

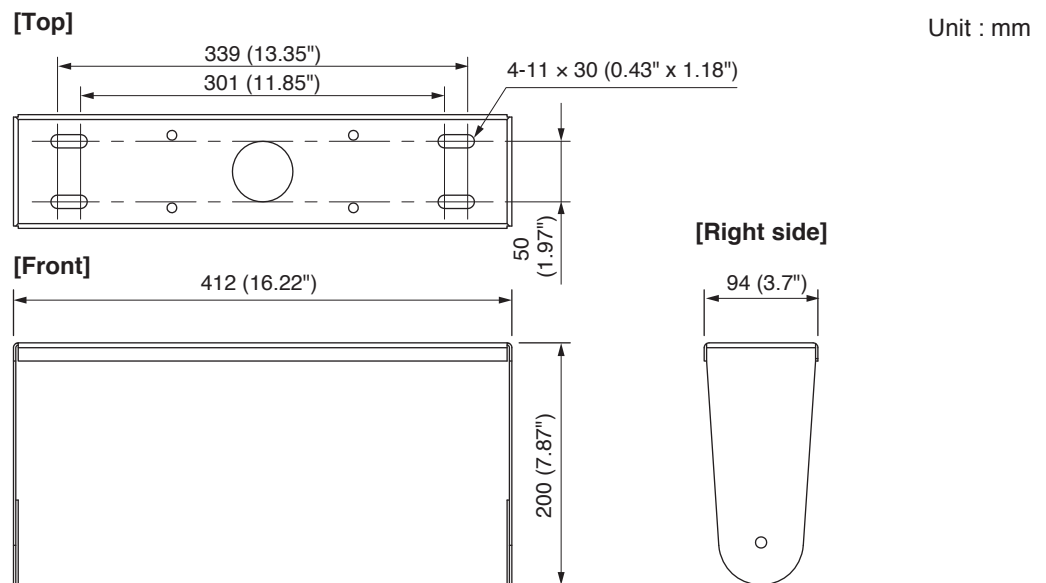

4. SPECIFICATIONS

Finish	Steel plate, black, semi-glossy, paint
Dimensions	412 (w) x 200 (h) x 94 (d) mm (16.22" x 7.87" x 3.7")
Weight	1.3 kg (2.87 lb)

Note: The design and specifications are subject to change without notice for improvement.

• Accessories

Hex head bolt M8 x 30 with spring and plain washers ... 2

• Optional products


Speaker mounting bracket : HY-B0801

Ceiling mount bracket: HY-C0801

Wall mount bracket: HY-W0801

5. INSTALLING TO THE SPEAKER

Step 1. Remove 1 each screw on the optional speaker system SR-F04's top and bottom surfaces.




Step 2. Attach the bracket to the SR-F04 with the supplied hex head bolts.

Note

The screws removed in **Step 1** cannot be used.

Hex head bolt
(accessory,
1 each on both sides)

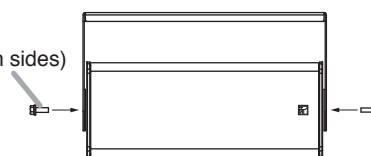

Step 3. Attach this bracket to the Bracket B of the speaker mounting bracket to join.
For attachment, use the 4 hex head bolts supplied with the speaker mounting bracket to join.

Note


Use all 4 hex head bolts and securely tighten them.

Step 4. Using the Bracket A of the speaker mounting bracket to join, install the speaker to the desired location.

For mounting the speaker (attached with the bracket) to the Bracket B, use the 4 hex head bolts supplied with the speaker mounting bracket to join.

Notes

- For the installation of the Bracket A, read the instruction manual of the speaker mounting bracket to join.
- Use all 4 hex head bolts and securely tighten them.

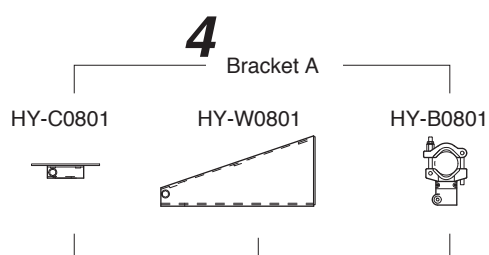


3


Bracket B
(component of
the HY-C0801,
HY-W0801, or
HY-B0801)

Hex head bolts supplied with
the HY-C0801, HY-W0801, or
HY-B0801 (M8, 4 places)

Tightening torque: 8 N·m

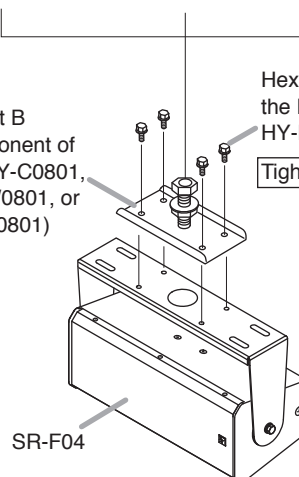

Step 5. Loosen the hex head bolts installed in **Step 2**, and adjust the vertical angle of the SR-F04. Then, securely retighten the bolts.

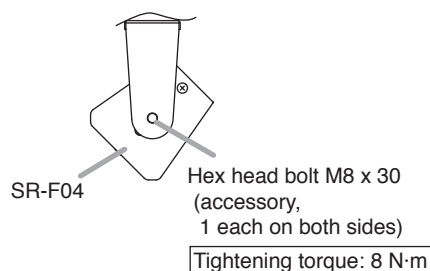

Hex head bolt M8 x 30
(accessory,
1 each on both sides)

Tightening torque: 8 N·m

6. INSTALLING THE SPEAKER DIRECTLY TO THE WALL OR CEILING


Without using the HY-C0801 or HY-W0801, you can directly install the SR-F04 to the wall or ceiling with this bracket only.



WARNING

Owing to the speaker's size and weight, be sure that at least two persons are available to install the speaker. Failure to do so could result in personal injury.

Step 1. Remove 1 each screw on the optional speaker system SR-F04's top and bottom surfaces.



Step 2. Install this bracket to the wall or ceiling.




WARNING


Bolts and nuts used to fix the Bracket A on a wall are not included.

Prepare those that are appropriate for the wall's structure and composition. Failure to do so may cause the speaker to fall, resulting in personal injury.

Secure the bracket with 4 bolts using all the 4 mounting holes.
For the mounting bracket's dimensions and the mounting hole positions, see "DIMENSIONAL DIAGRAM."




Step 3. Install the SR-F04 to this bracket using the supplied hex head bolts.



Hex head bolt M8 x 30
(accessory,
1 each on both sides)

Step 4. Loosen the hex head bolts installed in **Step 3**, and adjust the vertical angle of the SR-F04. Then, securely retighten the bolts.



Hex head bolt M8 x 30
(accessory,
1 each on both sides)

Tightening torque: 8 N·m

Traceability Information for Europe

Manufacturer:
TOA Corporation
7-2-1, Minatojima-Nakamachi, Chuo-ku, Kobe, Hyogo, Japan

Authorized representative:
TOA Electronics Europe GmbH
Suederstrasse 282, 20537 Hamburg, Germany

URL: <https://www.toa.jp/>