


## DESCRIPTION

The MP-011 monitor panel comes with a speaker and a level meter, and allows monitor of the overall operation of an equipment rack. Amplifier input and output levels can be monitored for up to ten zones by selecting the desired zone.


## SPECIFICATIONS

Power Requirments	24 V DC
Power Consumption	400 mA
Input	10 zones high impedance level : 50 V/70 V/100 V (selectable) Line level : 0 dBV (1 V)
Speaker	33X14 mm dynamic speaker 3 W/8 Ω
Meter	7-point LED meter
Control Signal Input	Emergency control signal (bypasses volume control) Talk switch signal (feedback prevention)
Color	Black
Dimensions(WXHXD)	482 (18.98")x44 (1.73")x219.1 (8.63") mm
Weight	Approx. 2.45 kg (5.40 lb.)

## APPEARANCE




Rear View

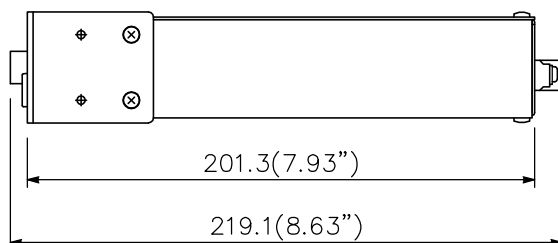

Side View

4-6x10  
(4-0.24" x 0.39")

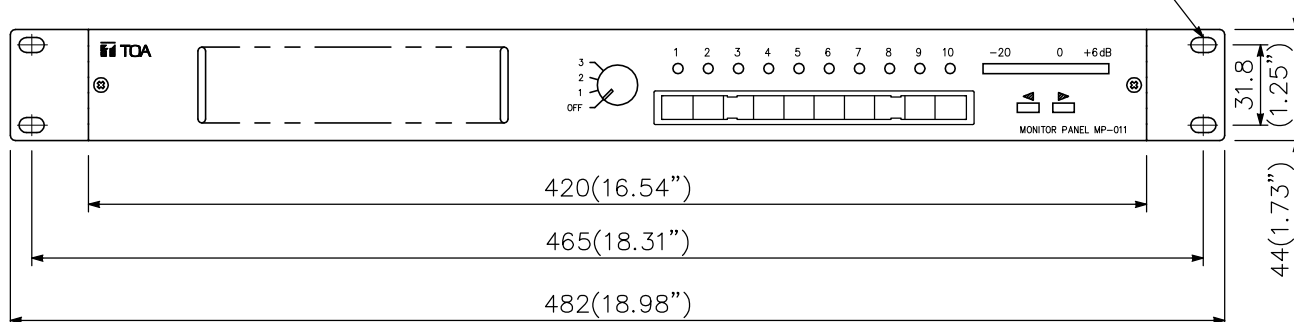

Front View

UNIT:mm SCALE:1/3

\*This product is intended for sales in Japan.